


AB5 .5 HP DIRECT DRIVE



Lightweight and Portable



Roll Cage Design

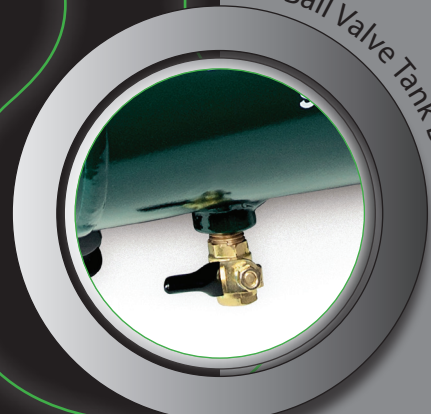

Ball Valve Tank Drain

SPECIFICATIONS

HORSEPOWER	.5 HP
MOTOR RPM	3450
CFM DELIVERED @ 40 PSI	1.0 CFM
CFM DELIVERED @ 90 PSI	0.7 CFM
CFM DISPLACED	1.4 CFM
TANK CAPACITY	1 GALLON
FACTORY SETTINGS	95-125 PSI
PUMP-UP / RECOVERY TIME	1:50 / :31
SHIPPING WEIGHT	25 LB
DIMENSIONS (LxWxH)	14.25"x13.25"x11.75"
NOISE LEVEL	68 dBA
THERMAL PROTECTION	MANUAL
AMP DRAW (RUNNING)	4.0

EQUIPMENT

FEATURES

- 4.6 AMP MOTOR
- SAFETY RELIEF VALVE
- START/STOP PRESSURE SWITCH
- 1/4" UNIVERSAL COUPLER
- REGULATOR
- PRESSURE-RELIEF VALVE


AB5 .5 HP TRANSMISIÓN DIRECTA



Ligero y portátil!



Armazón rígido protector

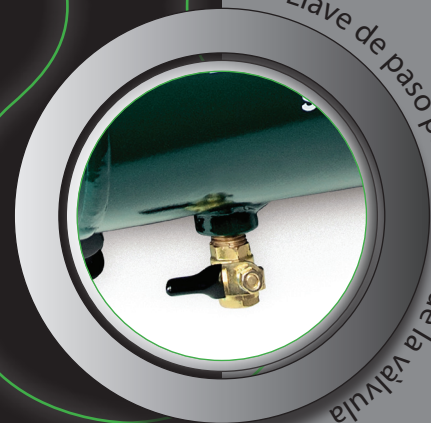

Llave de paso para preeje de la válvula

ESPECIFICACIONES

CABALLOS DE FUERZA	.5 HP
R.P.M. DEL MOTOR	3450
SALIDA DE PIES ³ A 40 PSI	1.0 CFM
SALIDA DE PIES ³ A 90 PSI	0.7 CFM
DESPLAZAMIENTO EN PIES ³ /MIN	1.4 CFM
CAPACIDAD DEL TANQUE	3.8 LITERS
VALORES DE FÁBRICA	95-125 PSI
TIEMPO DE BOMBEO A PRESIÓN OPERATIVA/TIEMPO DE RECUPERACIÓN	1:50 / :31
PESO DE ENVÍO	10 Kg
DIMENSIONES (LARGO x ANCHO x ALTURA)	36 cm x 34 cm x 30 cm
NIVEL DE RUIDO	68 dBA
PROTECCIÓN TÉRMICA	MANUAL
INTENSIDAD DE CORRIENTE	4.0

EQUIPO

CARACTERÍSTICAS

- MOTOR DE 4,6 AMPERIOS
- VÁLVULA DE LIBERACIÓN DE SEGURIDAD
- INTERRUPTOR DE PRESIÓN PARA ARRANQUE/DETENCIÓN
- ACOPLADOR UNIVERSAL DE 6,35 MM (1/4")
- REGULADOR Y INDICADOR
- VÁLVULA DE ARRANQUE EN FRÍO