

# 3000 Series Specifications



## Benefits:

- Cut Accuracy of 1/64"
- Frame Never Goes Out of Square
- Smooth Repetitive Carriage Movement
- Ten Second Tool Swap
- Mobility with Folding Stand and Wheels
- Outstanding Dust Evacuation System
- Minimal Set Up Time
- Rip Cut in Either Direction
- Utilize Stop Block on Left or Right

## Package Includes:

- Milwaukee 6470-21 Saw on Spinning Saw Insert Plate
- Standard 10" Saw Blade
- Dual Rip Gauges for Left or Right Rip Cuts
- Stop Block with Bar for Cutting Strips
- Dust Hose and Dust Containment Brush
- Folding Stand and Transport Wheels
- Horizontal Measuring Tapes
- Vertical Measuring Tape
- Side Stand Legs
- Steel Sleeved Material Rollers



Milwaukee 6470-21



Sealed Steel Roller Bearings




Measuring System



Dual Rip Pointers



Steel Sleeve Material Rollers

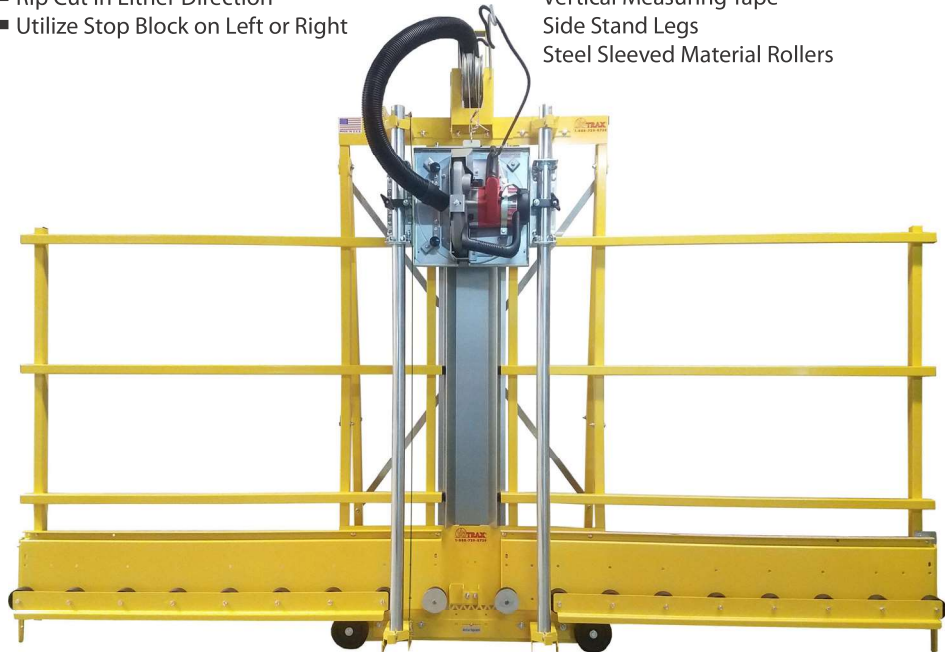

## Standard Equipment:

- Nickel Chrome Plated Guide Tubes
- Accu-Square Alignment System
- Accu-Glide Sealed Bearing System
- Accu-Fence Material Roller System
- Quick Release Carriage with 2 Locks
- Two Spool Retraction Mechanism
- Powder Coated Steel Frame
- Cord Holder
- Center Material Support

## Optional Accessories:

- Floating Router Insert Plate
- Coiled Extension Cord
- Spring Hold Down
- Sheet Clamp
- Full Builder's Extensions
- Full Mid-Fence
- Frame Dust Collection
- Laser Guide
- Flip Stop System

3000 Series Product Specifications	Full Size	Full Size	Full Size
Model Number	3050	3062	3074
Material Rollers - Steel Sleeved	18	18	18
Maximum Cross Cut	50"	62"	74"
Maximum Rip Cut	Unlimited	Unlimited	Unlimited
Maximum Cut Thickness	2-1/2"	2-1/2"	2-1/2"
Saw Blade Diameter	10"	10"	10"
Arbor Diameter	5/8"	5/8"	5/8"
Saw Motor, Milwaukee 6470-21	15 amp-120 v	15 amp-120 v	15 amp-120 v
Frame Height (set up)	78"	90"	102"
Frame Width (set up)	122"	122"	122"
Frame Depth-Stand closed with Saw	18"	18"	18"
Frame Depth with Stand open	40"	40"	40"
Shipping Weight	445#	485#	495#