


PRODUCT DESCRIPTION:

Made with a split upper shell designed for easy maintenance and high output fully enclosed motors, you can expect long life and faithful service from your Mr. Heater Forced Air Kerosene heater. This unit is equipped with a high-limit safety switch and a photo CAD cell to shut the unit off in unsafe conditions. You can use this heater with no worries and focus on the task at hand. This kerosene heater has all the versatility and safety features the jobsite requires.

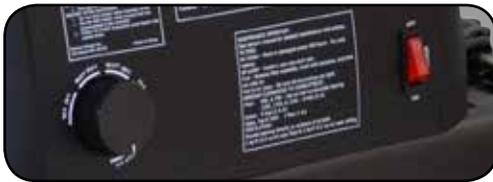

Built-in
thermostat

STANDARD FEATURES:

- Fuel: Kerosene, JP8, #1, 2 Diesel, #1,2 Fuel Oil (sold separately)
- BTU: 210,000
- Heat area: up to 5,250 sq. ft.
- Outdoor use only; use in well ventilated area

MH210KTR
F270385





SPECIFICATIONS

BTU per hour:	210,000
Heating area:	Up to 5,250 sq. ft.
Tank capacity:	13.4 gallons
Run time	8.5 hours
Fuel consumption/burn rate (Gal/Hr):	N/A
Electricity required:	Yes - 115V, 60Hz, 1ø, 2 Amp
Dimension:	12-1/2"W x 18"H x 41"D
Weight:	70 lbs.
Thermostat:	No
Onboard diagnostics	Yes
Fuel type:	Kerosene, JP8, #1 Diesel#2 Diesel #1 Fuel Oil#2 Fuel Oil
Heat type:	Forced Air
High limit safety shut-off (HLS):	Yes
Ignition:	Spark
Warranty:	1 Year
Approvals:	CSA/USA

CLEARANCE TO COMBUSTIBLES

Top:	36"
Bottom:	0"
Front:	96"
Back:	36"
Sides:	36"



CSA Certified

Always check local codes for permitted uses.

