

## 3" 2500 RPM Screwdriver & Attachment kit

Extremely versatile auto-feed attachment for professionals driving screws in many applications. Drives screws from 1" - 3" in length at 2500 rpm. The high torque motor delivers plenty of power to drive our longest screws into even the toughest materials. The kit comes complete with our SG2510 screwgun, industrial grade DS320 attachment, extension pole with secondary power grip handle, spare drive bits, and a storage bag.






### Applications

Drywall (to wood or steel studs), subfloor, wood decking, Sheathing to wood, sheathing to steel, wood decking, cement board, underlayment and flooring, drywall to wood, drywall to steel, composite decking, fiberglass backed gypsum sheathing, structural steel decking, rigid foam insulation, metal framing.

### Features and Benefits

- Includes extension pole with adjustable power grip handle for driving screws in a standing position
- Patent pending corner-fit feed system
- Patented sliding rail
- Clip free high strength bits
- Precise depth-of-drive adjustment with depth lock
- Rugged storage bag fits fully assembled kit
- Quick release for easy bit access
- Senco's limited one-year warranty

### Includes

SENCO SG2510 high-torque screwdriver, industrial grade DS320 attachment, extension pole with adjustable power grip handle, storage bag and 3 drive bit tips.   

### Specifications

Item #: . . . . . 6W0012N  
 RPM: . . . . . 0-2500  
 Torque: . . . . . 100 inlb  
 Amp draw: . . . . . 6.4  
 Weight: . . . . . 6.75 lbs. (3 kg)  
 Height: . . . . . 8.0" (203 mm)  
 Length: . . . . . 20.5" (521 mm)  
 with extension pole: . . 39.0" (990 mm)  
 Width: . . . . . 2.75" (70 mm)


### Fastener Specifications

Screw Lengths . . . . . 1" - 3" (25mm - 76mm)  
 Screw Diameters. . . . . #6 - #12

### Replacement Bits

Drive Bits-two per pack: EA0314, EA0315, EA0316   

## Features

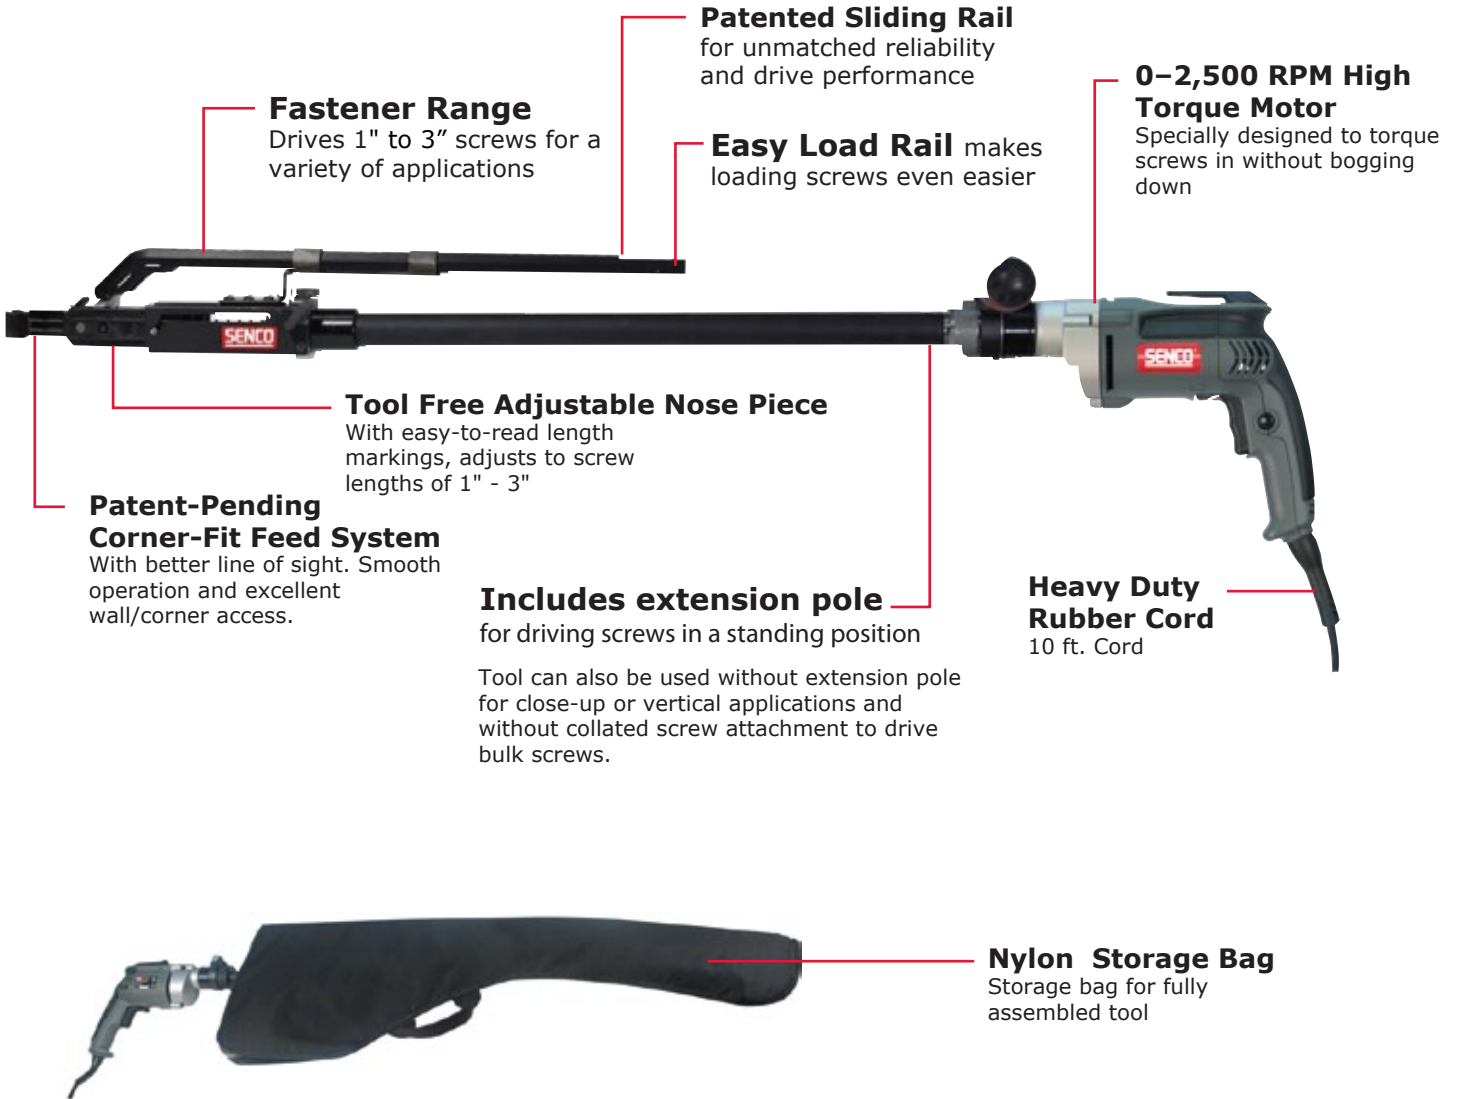

**Fastener Range**  
Drives 1" to 3" screws for a variety of applications

**Patented Sliding Rail**  
for unmatched reliability and drive performance

**Easy Load Rail** makes loading screws even easier

**0-2,500 RPM High Torque Motor**  
Specially designed to torque screws in without bogging down

**Tool Free Adjustable Nose Piece**  
With easy-to-read length markings, adjusts to screw lengths of 1" - 3"

**Patent-Pending Corner-Fit Feed System**  
With better line of sight. Smooth operation and excellent wall/corner access.

**Includes extension pole**  
for driving screws in a standing position

Tool can also be used without extension pole for close-up or vertical applications and without collated screw attachment to drive bulk screws.

**Heavy Duty Rubber Cord**  
10 ft. Cord

**Nylon Storage Bag**  
Storage bag for fully assembled tool

**Additional Drive Bits**  
**DS425**

Fits	SG2510	item#	item#	item#	item#
Two bits per pack		EA0314	EA0315	EA0316	