




540° Radiant Tank Top Heater



Shown on a 20 lbs. LP tank (sold separately)

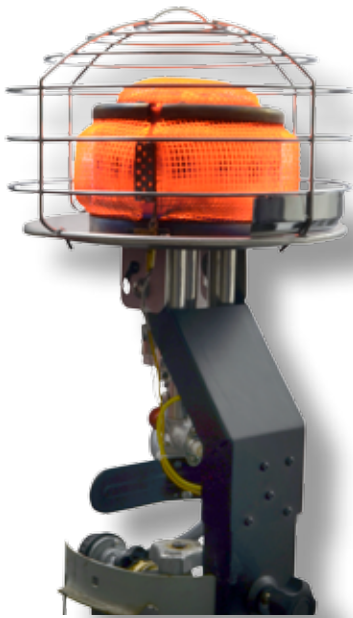

PRODUCT DESCRIPTION:

Mr. Heater's 540° tank top heater delivers energy efficient, multi-directional, radiant heat for construction sites, tailgating, and other applications where no electricity is available. The upright position throws heat in a 360° arc and can be tilted forward for directional heat. This heater is wind resistant and operates on a 20 lbs. propane tank.

STANDARD FEATURES:

- Fuel: propane (sold separately)
- BTU: 30,000, 36,000, and 45,000
- Heat area: up to 1,125 sq. ft.
- Run time: 14 hours (low setting), 12 hours (medium setting), 9.5 hours (high setting)
- Outdoor use only

High, medium, and low regulator

MH540T
F242540





CLEARANCE TO COMBUSTIBLES	
Top:	48"
Bottom:	27"
Front:	36"
Back:	36"
Sides:	36"

SPECIFICATIONS

BTU per hour:	30,000, 36,000, and 45,000
Heating area:	Up to 1,125 sq. ft.
Tank capacity (Min):	20 lbs.
Run time (Hours at max BTU):	9.5 (20 lbs.)
Run time (Hours at min BTU):	14 (20 lbs.)
Fuel consumption/burn rate (Gal/Hr):	N/A
Electricity required:	No
Maximum elevation:	N/A
Dimension:	11"W x 16"H x 11"D
Weight:	10.5 lbs.
Safety tip-over switch:	Yes
Thermostat:	No
Oxygen depletion sensor (ODS):	No
Hose & regulator Included:	No
Fuel type:	Propane
Heat type:	Radiant
High limit safety shut-off (HLS):	No
Ignition:	Match light
Indoor safe:	No
Warranty:	1 Year
Approvals:	CSA/USA



CSA Certified

Always check local codes for permitted uses.

