



Shown on a 20 lbs. LP tank (sold separately)

### PRODUCT DESCRIPTION:

This 10,000-45,000 heater is constructed with premium components to bring you reliable heat on the go. Each burner is capable of 15,000 BTU and can operate independently.

### STANDARD FEATURES:


- Fuel: propane (sold separately)
- BTU: 10,000, 30,000, and 45,000
- Heat area: up to 1,125 sq. ft.
- Run time: 12 hours (low setting), 9 hours (medium setting), 8 hours (high setting)
- Outdoor use only



High, medium, and low regulator

**MH45T**  
F242915



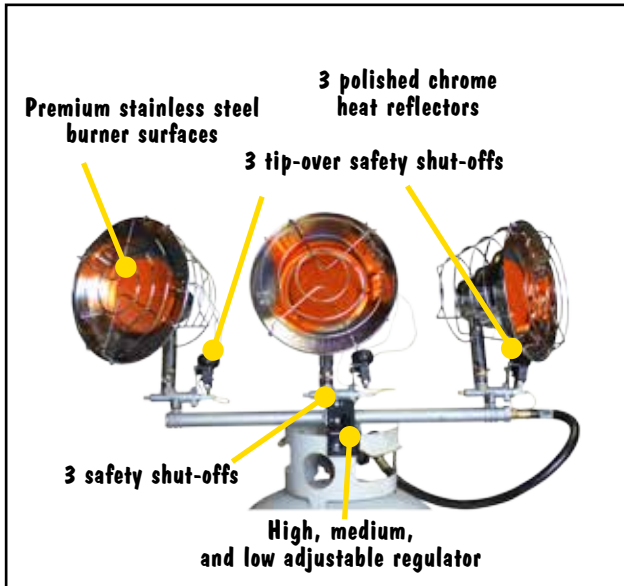

## CLEARANCE TO COMBUSTIBLES

<b>Top:</b>	<b>48"</b>
<b>Bottom:</b>	<b>32"</b>
<b>Front:</b>	<b>36"</b>
<b>Back:</b>	<b>48"</b>
<b>Sides:</b>	<b>36"</b>

## SPECIFICATIONS

<b>BTU per hour:</b>	<b>15,000, 30,000, and 45,000</b>
<b>Heating area:</b>	<b>Up to 1,125 sq. ft.</b>
<b>Tank capacity (Min):</b>	<b>20 lbs.</b>
<b>Run time (Hours at max BTU):</b>	<b>8 (20 lbs.)</b>
<b>Run time (Hours at min BTU):</b>	<b>35 (20 lbs.)</b>
<b>Fuel consumption/burn rate (Gal/Hr):</b>	<b>N/A</b>
<b>Electricity required:</b>	<b>No</b>
<b>Maximum elevation:</b>	<b>N/A</b>
<b>Dimension:</b>	<b>16-3/4"W x 16"H x 6-1/2"D</b>
<b>Weight:</b>	<b>9 lbs.</b>
<b>Safety tip-over switch:</b>	<b>Yes</b>
<b>Thermostat:</b>	<b>No</b>
<b>Oxygen depletion sensor (ODS):</b>	<b>No</b>
<b>Hose &amp; regulator Included:</b>	<b>No</b>
<b>Fuel type:</b>	<b>Propane</b>
<b>Heat type:</b>	<b>Radiant</b>
<b>High limit safety shut-off (HLS):</b>	<b>No</b>
<b>Ignition:</b>	<b>Match light</b>
<b>Indoor safe:</b>	<b>No</b>
<b>Warranty:</b>	<b>1 Year</b>
<b>Approvals:</b>	<b>CSA/USA</b>



CSA Certified

Always check local codes for permitted uses.

