

# TOTO®

# MW6263056CEFG

## Aimes® One-Piece Toilet, 1.28 GPF with WASHLET®+ S550e

### FEATURES

- Concealed supply connection for seamless installation
- Tornado Flush® system, high-efficiency (1.28 GPF/4.8 LPF)
- CeFiONtect® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Premist of bowl before each use
- Universal Height
- Elongated front bowl, WASHLET and tank set
- 12" Rough-in
- Chrome plated trip lever
- Remote control operated
- Auto open/close lid with night light

### MODELS

- **MW6263056CEFG (#01)**  
With CeFiONtect ceramic glaze & WASHLET S550e with contemporary design

### COMPONENTS

- **CST626CEFGT40**  
Elongated toilet with CeFiONtect
- **SW3056T40**  
WASHLET® S550e with contemporary design

#### Optional Components

- **TSU03W.10R**  
10" Unifit Rough-In
- **TSU03W.14R**  
14" Unifit Rough-In

### COLORS/FINISHES

- #01 Cotton

### PRODUCT SPECIFICATION

The one-piece high-efficiency Tornado Flush system toilet shall be 1.28 GPF/4.8 LPF. Toilet shall be 12" Unifit rough-in. Toilet shall have optional CeFiONtect ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with Polished Chrome trip lever. Toilet shall be TOTO Model MW6263056CEFG#01

See SW3056T40 Specification Sheet for details on included WASHLET.



 **Tornado Flush**

 **ewater+**

 **CeFiONtect**

 **Skirted Design**

### CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



# MW6263056CEFG

## Aimes® One-Piece Toilet, 1.28 GPF with WASHLET®+ S550e

### SPECIFICATIONS


<b>Water Use</b>	1.28 GPF (4.8 LPF)
<b>Flush System</b>	Tornado Flush®
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	7-3/4" x 9-3/8"
<b>Trap Diameter</b>	2-1/8"
<b>Rough-in</b>	12" (10" & 14" Optional)
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	119 lbs
<b>Shipping Dimensions</b>	32" L x 20" W x 17-3/4" H <sup>1</sup> x 28-3/4" H <sup>2</sup>

See SW3056T40 Specification Sheet for details on included WASHLET.

### INSTALLATION NOTES


#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

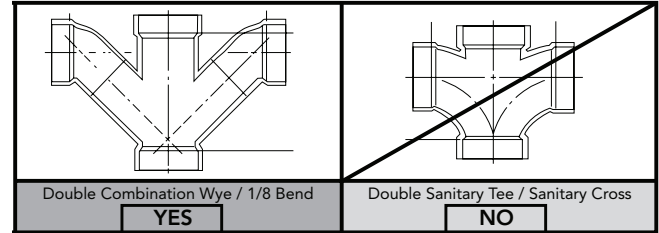

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

### DIMENSIONS

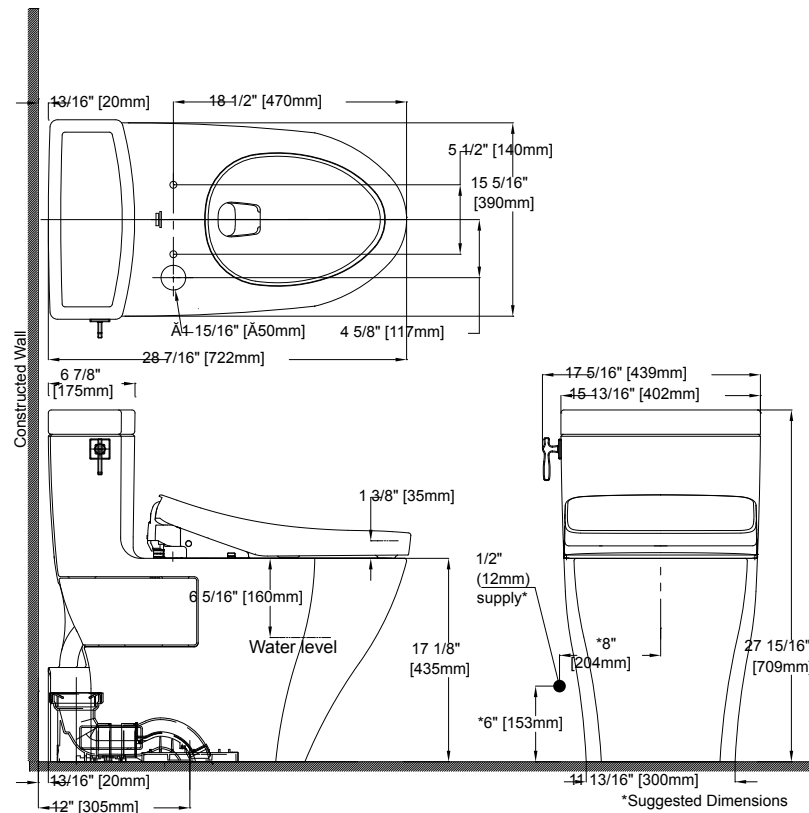

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-01327 v.02