



## **2018 CATALOGUE**

**DK2 CANADA**  
1080 Clay Avenue,  
Unit 2, Burlington, Ontario,  
L7L 0A1, Canada

**DK2 USA**  
6245 Industrial Parkway  
Whitehouse, Ohio,  
43571, United States

**TEL: 1-888-277-6960 [WWW.DETAILK2.COM](http://WWW.DETAILK2.COM)**



Detail K2 (DK2) believes in providing quality to our customers, delivering our products on time and in accordance with the ever changing needs of our clientele.

DK2 is committed to creating and maintaining powerful customer relationships built on a foundation of excellence. Our goal is to continuously bring to market innovative automotive and truck accessory products which effortlessly improve and shape the future.

We believe that our business can – and should – have a positive impact on the communities we serve. Whether it's Snow Plows, Winches, Trailers or any other products we sell, at Detail K2 we are focused on making our business and yours more efficient, sustainable and inviting than ever before.

## LIMITED 1 YEAR WARRANTY

### WHAT IS COVERED

DK2 Inc. warrants to the original purchaser of any DK2 product that it will be free and clear of manufacturing defects in workmanship and materials under normal use and service for a period of one (1) year from the date of the original purchase.

If within one (1) year from the original date of purchase this product fails due to defect in material or workmanship, Detail K2 will repair, replace, or supply any defective part at our option. Upon expiry of one (1) year, Detail K2 will have no further liability related to the product. Detail K2 does not authorize any party, including its authorized distributors or dealers, to offer any other warranty on behalf of Detail K2 Inc.

### THIS WARRANTY DOES NOT COVER OR APPLY TO:

- (a) Damage to the product due to misuse, mishandling and abuse
- (b) Improper installation, maintenance and storage
- (c) Expendable parts such as nuts and bolts, pins and springs
- (d) Normal wear and tear
- (e) Consequential damage & incidental damages such as damage to persons or property

### PROCEDURE FOR OBTAINING A RETURN AUTHORIZATION

Within the one (1) year warranty period, the purchaser of the product must notify an authorized distributor or dealer of the claimed defect and provide proof of original purchase. At this time the validity of the claim will be determined and a Return Goods Authorization Number (RGA) will be issued if approved. No returned product will be accepted under warranty unless accompanied by an RGA# issued by Detail K2 Inc.

### RESOLUTION FOR A DEFECTIVE PRODUCT

Detail K2 Inc. will at its option repair or replace the defective product covered by this warranty. The repaired product will be shipped to the purchaser upon completion. All transportation charges shall be the responsibility of the purchaser. Any damage in transit will be the responsibility of the carrier or at the risk of the purchaser.



**Multi Utility Trailer ..... 4-5**



**Galvanized Utility Trailer ..... 6-7**



**Mini Utility Trailer..... 8-9**



**Portable Battery Boosters ..... 10-11**



**Flip Rack .....12**



**Hitch-mounted Motorcycle Carrier .....13**



**Cargo Carrier ..... 14-15**



**Hitch Mounted Bike Racks ..... 16-17**



**Snow Plows ..... 18-21**



**Snow Plow Accessories ..... 22-23**



**DK2 Warrior Winches ..... 24-37**



**Winching Accessories ..... 38-39**





Truly the ultimate 1,500lb trailer available on the market today. This trailer is unique in its versatility and functionality. When the front and back load-bearing gates are in the down position, the bed of the trailer extends to nearly 12 feet. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable, and /or interchangeable, making this trailer the clear choice and one of the best values in the market today.



DESCRIPTION

The single axle multi-utility trailer from DK2 is one of the most versatile trailer on the market. Sitting on a solid square tube cambered axle with 30.5 cm (12 in.) 6 ply bias tires, and a load capacity of 1,639 lb (743.4kg). When the front and back load-bearing gates are down, the trailer bed extends to nearly 3.5 m (11.58 ft.). Another great feature is the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and / or interchangeable.

SPECIFICATION

|                   |                                                                                                                                                       |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| GVW:              | 2,090 lb. 948.0 kg                                                                                                                                    |
| Curb weight       | 451 lb. 204.6 kg                                                                                                                                      |
| Payload capacity  | 1,639 lb. 743.4 kg                                                                                                                                    |
| Bed dimensions    | 52 x 88 to 52 x 136 inches<br>1.32 x 2.24 to 1.32 x 3.45 m                                                                                            |
| Overall length    | 177 in. 4.50m tongue extended                                                                                                                         |
| Floor height      | 20 in. 50.8 cm                                                                                                                                        |
| Construction      | Fully welded tubular steel frame (hot dipped galvanized available)                                                                                    |
| Side panels       | 14 in. H 35.6 cm H Corrugated steel                                                                                                                   |
| Drop gates        | 24 in. H 61 cm H Corrugated                                                                                                                           |
| Lighting          | Trailer comes pre wired with quick connect LED lighting. Complies with DOT requirements. Adjustable rear light protectors and protected side markers. |
| Dump bed          | 2 position                                                                                                                                            |
| Hitch height      | 16 in. 40.6 cm                                                                                                                                        |
| Flooring          | 100% steel corrugated welded reinforced bed                                                                                                           |
| Assembly time     | 60 minutes approx.                                                                                                                                    |
| Carton dimensions | 88.5 x 55 x 8 inches (DWH)<br>224.79 x 139.7 x 20.32cm                                                                                                |

Also available hot dipped galvanized.



MIGHTY MULTI UTILITY TRAILER





DK2's legendary 5-in-1 Utility Trailer

Item Number: MMT5X7

FEATURES

- Back drop gate
- 100% Steel
- Heavy duty
- Best in Class
- Exclusive Design
- Extended bed length: nearly 12 feet / 3.66 metres.
- 2 position dump bed
- Quick release lock pin
- Load bearing gates
- Removable steel side panels
- Corrugated steel floor
- 100% welded tubular steel frame
- Heavy-duty tail light protectors
- Solid square tube cambered axle
- Easy-lube 5 on 4.5 hub assembly
- V tongue for added strength
- 2" coupler with safety chains
- 12 x 5.3 – 6 ply bias tires
- UPC – 826518003391

5 in 1 UTILITY TRAILER







The newest member of the DK2 trailer line up is the Hot Dipped Galvanized 5 x 7 Utility Trailer. The MMT5X7G is fully welded and hot dipped galvanized to protect the steel from the elements especially in coastal regions.



**GALVANIZED  
MIGHTY MULTI  
UTILITY TRAILER**



*DK2's legendary  
trailer just got hot  
dipped galvanized!*

## DESCRIPTION

Coming 2018 the newest member of the DK2 trailer line up is the Hot Dipped Galvanized 5 x 7 Utility Trailer. Constructed from 100% steel all the components are reinforced, adjustable, removable or interchangeable. The MMT5X7G is fully welded and hot dipped galvanized to protect the steel from the elements especially in coastal regions. This unit offers the end user excellent value for their money and will dramatically add to the life of the trailer kit. Each trailer ships in a single carton including pre wired LED lighting for easy installation.

## SPECIFICATION

|                   |                                                                                                                                                      |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| GVW:              | 2,090 lb. 948.0 kg                                                                                                                                   |
| Curb weight       | 451 lb. 204.6 kg                                                                                                                                     |
| Payload capacity  | 1,639 lb. 743.4 kg                                                                                                                                   |
| Bed dimensions    | 52 x 88 to 52 x 136 inches<br>1.32 x 2.24 to 1.32 x 3.45 m                                                                                           |
| Overall length    | 177 in. 4.50m tongue extended                                                                                                                        |
| Floor height      | 20 in. 50.8 cm                                                                                                                                       |
| Construction      | Fully welded hot dipped galvanized tubular steel frame                                                                                               |
| Side panels       | 14 in. H 35.6 cm H Corrugated steel                                                                                                                  |
| Drop gates        | 24 in. H 61 cm H Corrugated                                                                                                                          |
| Lighting          | Trailer comes pre wired with quick connect LED lighting. Complies with DOT requirements. Adjustable rear light protectors and protected side markers |
| Dump bed          | 2 position                                                                                                                                           |
| Hitch height      | 16 in. 40.6 cm                                                                                                                                       |
| Flooring          | 100% steel corrugated welded reinforced bed                                                                                                          |
| Assembly time     | 60 minutes approx.                                                                                                                                   |
| Carton dimensions | 88.5 x 55 x 8 inches (DWH)<br>224.79 x 139.7 x 20.32cm (DWH)                                                                                         |

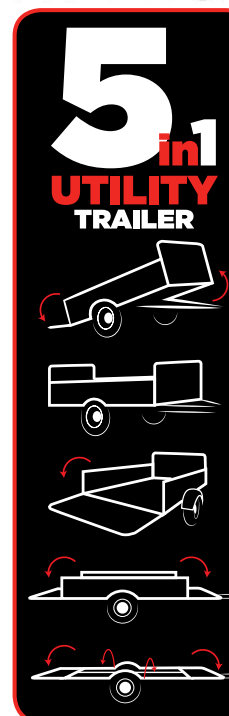

**Item Number:  
MMT5X7G**

## FEATURES

- Back drop gate
- 100% Steel
- Heavy duty
- Best in Class
- Extended bed length: nearly 12' / 3.66 metres.
- 2 position dump bed
- Quick release lock pin
- Load bearing gates
- Removable steel side panels
- Corrugated steel floor
- 100% welded tubular steel frame
- Heavy-duty tail light protectors
- Solid square tube cambered axle
- Easy-lube 5 on 4.5 hub assembly
- V tongue for added strength
- 2" coupler with safety chains
- 12 x 5.3 - 6 ply bias tires
- UPC - 826518004848

**DK2**  
TRUCK & AUTO ACCESSORIES  
[www.detailk2.com](http://www.detailk2.com)







The DK2 MMT4X6 single axle 1.2m x 1.8m (4ft. x 6ft.) trailer is the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size, lawn tractors or ATVs. This trailer is engineered to provide exceptional balance & ease of mobility with a load capacity of 587.4 kg (1,295 lb.). It is made from 100% welded tubular steel with expanded steel decks. The back gate is multi-purpose and can sit flat in the bed, up in a vertical position or lying down as a ramp for easy loading.



## MIGHTY MINI UTILITY TRAILER

*The 'little brother'  
of the MMT5X7 -  
Perfect for those  
smaller hauls!*

**Item Number:  
MMT4X6**

## DESCRIPTION

The "little brother" of the best-selling DK2 MMT5X7 is specially designed for handling a variety of hauling tasks. This trailer is the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, law tractor, or ATV.

The trailers are engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Every trailer is made from 100% welded tubular steel with expanded steel decks. Our back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp for easy loading.

## SPECIFICATION

|                    |                                                                                                                                                                   |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GVW:               | 1,600 lb. 725.7 kg                                                                                                                                                |
| Curb weight        | 305 lb. 138.3 kg                                                                                                                                                  |
| Payload capacity   | 1,295 lb. 587.4 kg                                                                                                                                                |
| Bed dimensions     | 48 x 72 inches<br>1.21 x 1.82 m                                                                                                                                   |
| Overall length     | 152 in. 3.86m tongue extended                                                                                                                                     |
| Floor height       | 18 in. 45.7 cm                                                                                                                                                    |
| Construction       | Fully welded HD tubular steel                                                                                                                                     |
| Side panels        | Solid Sides                                                                                                                                                       |
| Floating Ramp Gate | 36 in. Reinforced square<br>tube steel ramp with heavy duty<br>round tube exterior                                                                                |
| Lighting           | Trailer comes pre wired with quick<br>connect LED lighting. Complies<br>with DOT requirements.<br>Adjustable rear light protectors<br>and protected side markers. |
| Hitch height       | 14 in. 35.5 cm                                                                                                                                                    |
| Flooring           | 100% welded down corrugated steel<br>floor panel                                                                                                                  |



## FEATURES

- Capacity: 587.4 kg (1,295 lb.)
- Fully welded heavy-duty powder-coated steel frame
- Corrugated steel floor & solid side and front panels/rails
- Solid square tube cambered axle
- Drive up rear ramp tailgate
- 2 position dump bed axle mount with quick release lock pin
- Hitch height: 40.6 cm (16 in.)
- Heavy-duty tail light protectors
- LED quick connect lighting with side markers
- Wheel diameter: 12"
- Wheel bolt pattern: 5 on 4-1/2"
- Tire size: 4.80-12
- Load range: C
- Assembly required
- 1 7/8" coupler
- UPC - 826518004831







## DESCRIPTION

New to the DK2 family is the GL10 Portable Battery Booster. This unit is industry leading in every way and can provide a portable emergency power source when you need it most.

The GL10 comes with intelligent clamps that fit both 12V and 24V car jump starters. There is intelligent detection circuit which can tell the output voltage of 12V and 24V car jump starter, and start different protection system accordingly. The unit also has a warning sound and LED light reminder.

Overall protection functions include: back charge protection, overcharge protection, over discharge protection, shortage protection and reverse polarity protection, as well as function of testing the situation of the cars battery.



## HEAVY DUTY PORTABLE BATTERY BOOSTER PACK

**Item Number:**  
**GL10**

## ACCESSORIES

- Starting Power Bank
- Home Charger
- Micro Cable
- Jump Cable Battery Clamps
- 12 V Output Converter
- 24 V Output Converter
- User Manual
- Carrying Bag

## TECHNICAL SPECS

- Battery Capacity: 88.8 Wh
- Start Current: 400 A
- Peak Current: 800 A
- Input: 15 V / 2 A
- Output: 5 V / 2 A, 12 V / 24 V for Jump Start
- Charging Time: 4.5 Hours
- Life Time: > 800 Cycles
- Size: 7" L x 2.5" W x 2.5" H
- Weight: 1040g



## DESCRIPTION

The DK2 Power 2 Go is the incredibly powerful yet versatile battery jump starter that literally sits in the palm of your hand.

Slightly larger than your Smartphone, it is powerful enough to jumpstart most full sized cars and trucks. All this power and it can still be easily stored in your glove box. With multiple ports and adapters included, there's no longer a need to panic when your Smartphone, tablet or laptop is running low on power. Simply plug into your DK2 Power 2 Go and watch in amazement as your device quickly charges.

The P2G can be used on: Cars, Bobcats, ATV's, UTV's, Snow-mobiles, Golf carts, and Boats.



## POWER 2 GO PORTABLE BATTERY CHARGER

**Item Number:**  
**P2G850**

## FEATURES

- Built in rechargeable high output Lithium-iron battery
- 14,000 mAh capacity
- Upgraded Copper Booster cables and clamps
- Output: 12V / 5V, 2 A
- Peak Current 400A
- 850 Cold Cranking amps starting current
- Can boost a single vehicle 20 times on a single charge
- Overload and over-charge protection
- Charging adapters for most major electronic devices

## TECHNICAL SPECS

- Item Number: P2G850
- Unit Dimensions: 6.3 x 3.0 x 1.4"
- Assembled Weight: 2 lbs
- Gross Weight: 3 lbs
- Box Dimensions: 11 x 2 x 8"
- UPC: 826518005142





# HITCH-MOUNTED MOTORCYCLE CARRIER

*Mounts to any 2" hitch receiver*

**Item Number:**  
**TMC201**

## DESCRIPTION

### How to determine weight capacity

To determine the weight capacity for the Detail K2 Hitch Mounted Motorcycle Carrier, you must first determine the tongue weight limit of your hitch receiver AND the tongue weight limit of your vehicle. Take the lesser of these two figures and see the chart opposite:

| Hitch / Vehicle Tongue Weight Limit (use lowest figure) |         | Max. Carrying Capacity of K2 Carrier |        |
|---------------------------------------------------------|---------|--------------------------------------|--------|
| 300 lb.                                                 | 136 kg  | 180 lb.                              | 82 kg  |
| 350 lb.                                                 | 159 kg  | 225 lb.                              | 102 kg |
| 500 lb.                                                 | 227 kg. | 350 lb.                              | 159 kg |
| 750 lb.                                                 | 340 kg  | 450 lb.                              | 204 kg |

Example 1 If you have an SUV with a hitch receiver max. tongue weight of 500 lbs, AND your SUV manufacturer states that the maximum tongue weight for your vehicle is 500 lbs, then the maximum weight you can load on the Detail K2 Hitch Mounted Motorcycle Carrier is 350 lbs.

Example 2 If you have an SUV with a hitch receiver max. tongue weight of 500 lbs, BUT your SUV manufacturer states that the maximum tongue weight for your vehicle is only 350 lbs, then the maximum weight you can load on the Carrier is 225 lbs.



## FEATURES

- Extremely versatile, Extremely secure and stable: patent-pending design results in snug, "anti-wobble" fit.
- Tilts down to allow easy loading: one-person operation
- Easily installed and removed: no extra tools required
- Ideally suited for SUV, RV, or pickup truck with cap
- Features adjustable front wheel channel (to accommodate different sized bikes) and retractable tie-down bar
- Comes with safety chains and hitch pin
- Fits standard 2-" class III or IV hitch receiver: weight capacity dependent on receiver strength
- Black UV powder-coat finish
- UPC: 693495970561



# DK2 FLIP RACK

*Easy, no drilling installation*

**Item Number:**  
**TFR150**

## DESCRIPTION

The TFR150 give you flexibility and combines the safety and security of a headache rack with the functionality of an elevated ladder rack. Installation takes minutes, requires no drilling and fits most full size trucks.

With a simple flip up and back of the crossbar the rack immediately gives you the ability to transport everyday things that require extra length. Ladders, pipe, lumber and even canoes all easily tie down fixed and secure on the upper deck. Once you're done the crossbar is easily flipped forward and down and secured back to its starting position against the headache rack.

## AVAILABLE ACCESSORIES

- Light Bar
- Boat Rack
- Adaptor Kit for Hard Top Tonneau Covers



## FEATURES

- Converts from a window guard into a full-length utility rack with a simple "flip" of a crossbar
- Strong and rigid: heavy-duty steel construction
- Cargo can be secured to window guard to prevent shifting loads
- Rack can support up to 225 kg / 500 lbs (distributed) in open position: ladders, lumber, etc.
- Easily installed and removed
- No drilling truck (clamps provided)
- Fits most makes and model trucks
- Pkg. dim.: 54.0 x 24.0 x 5 inches (1372 x 610 x 127 mm)
- Gross weight: 121.25 lb. (55 kg)
- Minimum bed width is 51 inches
- UPC: 693495970721





## HITCH MOUNTED CARGO CARRIER

*Mounts to any 2" hitch receiver*

**Item Number:**  
**HCC602**

### DESCRIPTION

Increase the cargo capacity of your vehicle or haul bulky, messy items like luggage, coolers or firewood. Easy assembly. Conveniently mounts to any 2" hitch receiver on cars, SUVs, trucks, or vans.



Flips up when not in use, and stows up against the rear of the vehicle.



### FEATURES

- Black powder-coat finish resists corrosion.
- Carrying capacity dependent on receiver strength: 500 lb. (226.8 kg) when used with a Class III / IV hitch.
- Heavy-duty tubular and expanded steel mesh construction.
- Mounts to any 2" hitch receiver.
- Conveniently flips up when not in use.
- Ships unassembled.
- Dimensions: 60 x 20 x 6 inches (152.4 x 50.8 x 15.2 cm).
- Assembled weight: 59.5 lb. (27 kg).
- UPC: 827518001165



## ALUMINIUM HITCH MOUNTED CARGO CARRIER

*Mounts to any 2" hitch receiver*

**Item Number:**  
**HCC502A**

### DESCRIPTION

The DK2 Hitch Mounted Aluminum Cargo Carrier allows you to immediately increase the cargo capacity of your vehicle so you can haul bulky, messy items like luggage, coolers or firewood. This functional item has a 500lb carrying capacity and also flips up close to your vehicle when not in use. The aluminum construction is lightweight while still being durable and rust proof.



### TECHNICAL SPECS

#### Assembled Product:

- Height: 6.5 Inches
- Width: 49.5 Inches
- Depth: 22.25 Inches
- Weight: 29 lbs.

#### Packaged Product:

- Height: 4 Inches
- Width: 50 Inches
- Depth: 24 Inches
- Weight: 32 Lbs

### FEATURES

- Increase The Cargo Capacity Of Your Vehicle.
- Easy Assembly.
- Mounts To Any 2 in. Hitch Receiver.
- Flips Up When Not In Use; Stows Against Rear Of Vehicle.
- Aluminum Finish Resists Corrosion.
- Includes threaded anti-wobble hitch pin for added stability.
- Carrying Capacity Dependent On Receiver Strength.
- Ships Unassembled.
- Reflectors for added safety.
- UPC: 826518005051





## HITCH MOUNTED BIKE CARRIER

*Mounts to any 2"  
hitch receiver*


**Item Number:  
BCR390**

### DESCRIPTION

Family holidays are always better when you take the bikes along too. Detail K2 offers two different hitch mounted bike racks to do just that. Carry up to 4 bicycles easily.



Three different positions allow you to minimize distance bike carrier extends while also being able to swing the unit away and access the rear of your vehicle.

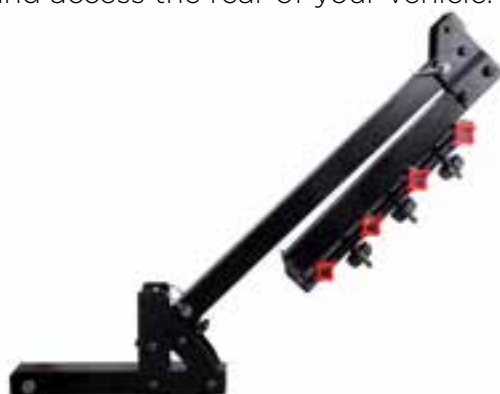

### FEATURES

- Carries up to 4 bikes with easy to mount system
- Cradles padded with rubber to protect bike finish
- Cradle bar folds down when not in use
- Unit swings down for access to the rear of the vehicle
- Steel construction
- Black powder coat finish resists scratches and corrosion
- Slides into a standard 2" hitch receiver
- Anti-wobble hitch pin secures unit to hitch
- Shipped unassembled
- Full colour carton
- Pkg. dim.: 36 x 11 x 6 inches (914 x 279 x 152 mm)
- Gross weight: 26 lb. (11.7 kg)
- UPC: 826518004879



## HITCH MOUNTED BIKE CARRIER

*Mounts to any 2"  
hitch receiver*

**Item Number:  
BCR490**

### DESCRIPTION

Family holidays are always better when you take the bikes along too. Detail K2 offers two different hitch mounted bike racks to do just that. Carry up to 4 bicycles easily.



Three different positions allow you to minimize distance bike carrier extends while also being able to swing the unit away and access the rear of your vehicle.



### FEATURES

- Carries up to four bicycles on individually adjustable cradles
- Padded no-mark cradles with dual bike retention straps
- Cradle bar folds down when not in use
- Carries up to 4 bicycles on adjustable saddles
- Saddle bar folds down when not in use
- Unit swings down for access to the rear of vehicle
- Steel construction
- Black powder coat finish resists scratches and corrosion
- Slides into a standard 2" hitch receiver, Class III or IV (optional 1-1/4" adaptor kit available upon request)
- Shipped unassembled
- Weight: 44 lb. (19.96 kg)
- UPC: 827518001172





**DK2**  
**SNOW PLOWS**

**All DK2 Snow Plows allow you to quickly & effectively remove snow from your driveway or small parking lot. DK2's range of personal plows each mount on to a vehicle specific custom mounting brackets. Ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch.**

- Fits most light trucks and SUV's
- Easy to mount – simply slides onto your custom vehicle specific mounting brackets in seconds. Slide out and roll away for storage
- An electric winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel construction with UV protected paint
- Locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- ISO 9001 certified manufacturer
- 1 year limited warranty
- Ships in a single carton on a standard size pallet



**Upgraded Winch**



**Upgraded Wireless Control**



**All versions ship in a single carton.**



**\*Custom Mount sold separately.**



## DESCRIPTION

Our brand new DK2 Avalanche Snow Plow kits combine the simplicity of our original T-Frame plow with the strength of our custom mount frame.

The DK2 Avalanche Snow Plow allows you to quickly and effectively remove snow from your driveway or small parking lot. The Avalanche simply slides into a 2" front mount receiver for easy removal and storage.

Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch. Each Avalanche plow will also include a set of blade stiffeners for added strength by creating a 3 point connection.



## SPECIFICATION

- **Item Number: AVAL8219**
- Blade Dimensions: 82 x 19 Inches H
- Assembled Weight: 265 lbs
- Gross Weight: 321 lbs
- Box Dimensions: 46 x 36 x 18 Inches
- UPC: 826518004992
- **Item Number: AVAL8422**
- Blade Dimensions: 84 x 22 inches H
- Assembled Weight: 283 lbs
- Gross Weight: 334 lbs
- Box Dimensions: 44 x 32 x 18 inches
- UPC: 826518005005

## ACCESSORIES

Light kit and replacement parts available for purchase.



**Plow Stiffeners Included**

## AVALANCHE SNOW PLOW

### Universal Mount

**Item Numbers:**  
**AVAL8219**  
**AVAL8422**

## FEATURES

- Fits most light trucks and SUV's
- Easy to mount – simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage
- An electric winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint
- Flip down locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength
- ISO 9001 certified manufacturer
- 1 year limited warranty



## DK2 SUMMIT II



## DK2 STORM II



## DK2 RAMPAGE II



## DK2 SNOW PLOWS

### CUSTOM MOUNT SNOW PLOW KITS

#### Wireless Winch

#### SUMMIT II 88x26" SNOW PLOW

##### Item Number: SUMM8826

- Blade Dimensions: 88 x 26 inches
- Assembled Weight: 296 lbs
- Gross Weight: 341 lbs
- Box Dimensions: 46 x 35 x 17 inches
- Custom mount sold separately
- UPC: 693495992181

#### STORM II 84x22" SNOW PLOW

##### Item Number: STOR8422

- Blade Dimensions: 84 x 22 inches
- Assembled Weight: 283 lbs
- Gross Weight: 325 lbs
- Box Dimensions: 44 x 32 x 18 inches
- Custom mount sold separately
- UPC: 693495992174

#### RAMPAGE II 82x19" SNOW PLOW

##### Item Number: RAMP8219

- Blade Dimensions: 82 x 19 inches
- Assembled Weight: 265 lbs
- Gross Weight: 315 lbs
- Box Dimensions: 43 x 32 x 18 inches
- Custom mount sold separately
- UPC: 693495992167



## DK2 ELITE SERIES

### CUSTOM MOUNT SNOW PLOW KITS

#### Wireless Actuator

#### SUMMIT II ELITE 88x26" SNOW PLOW

### DESCRIPTION

Dk2's line of personal snow plows just got better! The DK2 ELITE SERIES Snow Plow line up takes its simple yet effective design and improves on it with a wireless actuator for ultimate reliability.

DK2's ELITE SERIES each mount on to a vehicle specific custom mounting brackets. Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a wireless electric actuator kit.

### FEATURES

- Fits most light trucks and SUV's
- Easy to mount – simply slides onto your custom vehicle specific mounting brackets in seconds. Slide out and roll away for storage
- An electric actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel construction with UV protected paint
- Locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- ISO 9001 certified manufacturer
- 1 year limited warranty
- Ships in a single carton on a standard size pallet

## DK2 SUMMIT II ELITE SERIES

#### STORM II ELITE 84x22" SNOW PLOW

## DK2 STORM II ELITE SERIES

#### RAMPAGE II ELITE 82x19" SNOW PLOW

## DK2 RAMPAGE II ELITE SERIES





## ACCESSORIES

### More Snow Plow Accessories

| Item No | Description                 | UPC             |
|---------|-----------------------------|-----------------|
| AF6     | A Frame                     | 6 93495 99258 7 |
| DFS     | D Frame                     | 6 93495 99259 4 |
| CH55    | Chain                       | 6 93495 99278 5 |
| WCB     | Winch Control Box           | 8 26518 00312 4 |
| RC17    | Receiver                    | 6 93495 98004 1 |
| MF      | Main Frame                  | 8 26518 00353 7 |
| PSB-2   | 1st Gen Support Bracket (2) | 8 26518 00456 5 |
| 88RB    | 88" Right Blade             | 6 93495 99005 7 |

| Item No  | Description      | UPC             |
|----------|------------------|-----------------|
| 88LB     | 88" Left Blade   | 6 93495 98007 2 |
| 84RB     | 84" Right Blade  | 8 26518 00347 6 |
| 84LB     | 84" Left Blade   | 8 26518 00348 3 |
| 82RB     | 82" Right Blade  | 8 26518 00349 1 |
| 82LB     | 82" Left Blade   | 8 26518 00350 6 |
| FR7-2    | Frame Pin(2/box) | 6 93495 99279 2 |
| CP21     | Clevis pin       | 6 93495 99277 8 |
| HEATSYNC | Heat Sync Cable  | 6 93495 99022 4 |

#### Universal Steel Skid Shoes



- Qty: 2
- Item No: SS2600
- UPC: 6 93495 99262 4

#### Universal Plow Markers



- Qty: 2
- Item No: PM2700
- UPC: 6 93495 99263 1

#### Replacement Winch



- Item No: EW8020
- UPC: 6 93495 97027 1

#### Replacement Winch Strap



- Item No: WS8020
- UPC: 6 93495 99282 2

#### Scraper Blades



- SB8200 - 82" - 6 93495 99269 3
- SB8410 - 84" - 6 93495 99270 9
- SB8820 - 88" - 6 93495 99271 6

#### Snow Deflector rubber only



- RUB82 - 82" - 6 93495 99272 3
- RUB84 - 84" - 6 93495 99273 0
- RUB88 - 88" - 6 93495 99274 7

#### Wireless Winch Remote



- Simple key fob design with no-fuss wireless connection to the winch
- UPC: 6 93495 97026 4

#### Replacement Castor Wheel



- CW2300- Rigid- 6 93495 99260 0
- SW2300- Swivel- 6 93495 99261 7

#### Replacement Springs



- SPR1082EYE- 82"- 6 93495 97042 4
- SPR108488EYE- 84/88" - 6 93495 97043 1

## LIGHTING



### Snow Plow Lighting



All kits come with bull moose style mounting bar.

#### LED Spot Work Light Kit

**PART NUMBER  
81256LB2**



- Long life LED reduces maintenance costs and downtime.
- Solid state design for reliable operation in all conditions
- 24 LED Spot Pattern
- Operating voltage: 12 V DC
- Weight: 1.5 lb. (0.68 kg) each
- PDM housings with bracket
- Lumens: 400
- UPC: 8 26518 00305 6

#### Standard Plow Halogen Light Kit

**PART NUMBER  
83026LB2**



- Polymer housing & glass lens
- Includes 2 lamps with H3 bulbs, bracket, switch, relay & harness
- Reversible mount
- Operating voltage / current / power: 12 V DC, 4.6 A, 55 W
- Dimensions (LWH): 2.3" x 5.4" x 3.1" (58 x 137 x 79 mm)
- UPC: 8 26518 00307 0

#### Halogen Snow Plow Light with Turn Signals

**PART NUMBER  
814882**



- Pre-wired with high beam, low beam and turn signal
- Operating voltage: 12 Vdc
- Application: forward lighting
- Glass lens
- Includes bracket and wiring harness
- UPC: 058205814885





**Detail K2 Warrior Winches are the #1 selling brand of winches in Europe and are now proudly available in North America. In partnership with our distributors we supply the North American market with a complete range of electric, worm drive, and hydraulic winches.**



## Features

In the most extreme conditions, when lesser products might be found wanting, DK2 Warrior Winches will deliver what your customer demands and our service levels will raise the bar in the process.

Whatever the requirement and whatever the vehicle we can supply a DK2 Warrior Winch that will provide exceptional performance and be backed by only the highest level of customer service and after sales support thus our motto "Value Without Compromise".

## Value for money specification

At Detail K2 Inc. we recognize that our customers want an all-inclusive price and do not want the bother of searching through a long, expensive extras list. It's for this reason that each one of our Winches is supplied as standard, with a specification that translates into exceptional value for your hard earned money.

Highest quality motors are the powerhouse, 3 stage Planetary Gears provide the right ratios for any task. Our water resistant solenoids and fully sealed housings deliver reliability in the field regardless of what Mother Nature throws your way.

## Limited Lifetime Warranty

It shouldn't come as a surprise that every DK2 Warrior Winch is backed by a no quibble Limited Lifetime Warranty. We are so confident in our product that in the unlikely event something should go wrong there will be a simple and direct commitment to rectifying the problem. It's this integrity that translates into knowing our service and reputation will deliver when called on.

A 1 year warranty is offered for commercial and industrial applications. For more warranty information please visit our website at [www.detailk2.com](http://www.detailk2.com)





DESCRIPTION

Ideal for large ATV's and small trailers. A huge high power motor, heavy duty clutch, heavy duty steel gearing and heavy duty waterproof contactors ensure the ultimate in performance and reliability. Strengthened Steel drum makes it ideal to use with Synthetic Rope.

Watertight 4 Pin connection allows the use of 'Plug and Play' Wireless.



Synthetic version available

SPECIFICATION

C2500N

**RATED LINE PULL:** 2500lbs(1134kg)  
**MOTOR: 12v :** 1.35hp / 0.95kw  
**GEARING:** 170:1  
**BRAKING ACTION:** Dynamic  
**DRUM SIZE Dia x L:** 1.5 x 3.1"  
**CABLE Dia x L:** 0.2" x 46 ft  
**MOUNT PATTERN:** 3.1"  
**DIMENSIONS:** 13.2 x 4.4 x 6.5"

C3500N

**RATED LINE PULL:** 3500lbs (1588kg)  
**MOTOR: 12v :** 1.95hp / 1.37kw  
**GEARING:** 170:1  
**BRAKING ACTION:** Dynamic  
**DRUM SIZE Dia x L:** 1.5 x 3.1"  
**CABLE Dia x L:** 0.2" x 42 ft  
**MOUNT PATTERN:** 3.1"  
**DIMENSIONS:** 13.7 x 4.6 x 6.5"

NINJA

NINJA SERIES  
ATV WINCHES

Item Numbers:  
C2500N, C2500N-SR  
C3500N, C3500N-SR

FEATURES

- Sealed High Power Motor
- Heavy Duty Watertight Contactors
- Full Steel Planetary Gearing
- Strengthened Steel Drum (suitable for Synthetic rope)
- Watertight Controller Socket
- Gloss Chip Resistant Paint

INCLUDED

- Steel Cable
- Heavy Duty Roller Fairlead
- Heavy Duty Battery Leads
- 3 Tonne Pulley Block
- Mounting plate & Hardware
- 1/4 hook



DESCRIPTION

High quality three stage planetary gearing ensure this is one of the quietest and smoothest winches on the market.

The silky smooth performance and the full load holding brake make it the perfect solution for high spec applications.



Synthetic version available



NINJA

NINJA SERIES  
TRAILER WINCHES

Item Numbers:  
C4500N  
C4500N-SR

FEATURES

- Power in and Power out
- High Torque 1.95hp Motor
- HD Waterproof Contactors
- Full Steel Planetary Gearing
- Mount Plate as Standard
- Full Load Holding Break
- Can fit tow ball mount

INCLUDED

- 0.25" x 47.5ft Steel Cable
- 3m Remote Handset
- Heavy Duty Roller Fairlead
- Heavy Duty Battery Leads
- Mounting plate
- Mounting hardware
- 3/8 hook
- \*ATV remote available

SPECIFICATION

**RATED LINE PULL:** 4500lbs (2041kg)  
**MOTOR: 12v :** 1.95hp / 1.37kw  
**GEARING:** 172:1  
**BRAKING ACTION:** Auto in the drum  
**DRUM SIZE Dia x L:** 1.7 x 3.8"  
**CABLE Dia x L:** 0.25" x 47.5ft  
**MOUNT PATTERN:** 5 x 3.7"  
**DIMENSIONS:** 14.4 x 4.9 x 6.4"  
**WEIGHT:** 28.6 lbs

| Layer of wire rope | Line pull lbs (kg) |
|--------------------|--------------------|
| 1                  | 4500 (2401)        |
| 2                  | 3642 (1652)        |
| 3                  | 3060 (1388)        |
| 4                  | 2638 (1196)        |

| Line pull lbs (kg) | Line speed ft/min | Line speed m/min | Amp draw 12v | Amp draw 24v |
|--------------------|-------------------|------------------|--------------|--------------|
| 0                  | 11.6              | 3.6              | 20           | 15           |
| 1500 (680)         | 9.2               | 2.8              | 70           | 40           |
| 2500 (1134)        | 7.8               | 2.4              | 100          | 65           |
| 3500 (1587)        | 6.6               | 2.0              | 140          | 80           |
| 4500 (2041)        | 4.9               | 1.5              | 200          | 130          |





DESCRIPTION

Warrior Winches are delighted to announce the arrival of the new member of Spartan Series, Tough, Strong and ready for Battle. The Spartan 6000 Lb short drum model is ideal where space and payload are limited. The winch has a short drum and is less than 66Lbs, however the extended drum supports allow it to carrier up to 131ft of 0.28" cable. The Synthetic rope version comes fitted with 0.27" x 98ft.

We really believe these to be the best value for money Winches around, a lower price does not mean that we have had to compromise the core values integral to a good winch, such as reliability and durability.

With great performance, outstanding features included as standard, & backed by the Warrior Winches un-rivalled limited Lifetime Warranty, this should make a Spartan the first choice for all serious enthusiasts.

SPECIFICATION

**RATED LINE PULL:** 6000 lbs (2727kg)  
**MOTOR: 12V:** 4.5hp / 3.4kW  
**GEARING:** 230:1  
**DRUM SIZE Dia x L:** 2.48 x 4.2"  
**CABLE Dia x L:** 0.28" x 131"  
**DIMENSIONS:** 17.4 x 7.7 x 10.8"  
**WEIGHT:** 66 lbs



| Layer of wire rope | Line Pull lbs (kg) | Cable Cap ft (m) |
|--------------------|--------------------|------------------|
| 1                  | 6000 (2727)        | 9.8 (3.0)        |
| 2                  | 4979 (2258)        | 22.0 (6.7)       |
| 3                  | 4255 (1930)        | 36.1 (11.0)      |
| 4                  | 3714 (1685)        | 52.2 (15.9)      |
| 5                  | 3296 (1495)        | 70.5 (21.5)      |
| 6                  | 2962 (1344)        | 90.9 (27.7)      |
| 7                  | 2690 (1220)        | 113.2 (34.5)     |
| 8                  | 2463 (1117)        | 131.2 (40.0)     |

| Line pull lbs (kg) | Line speed ft/min | Line speed m/min | Amps 12v |
|--------------------|-------------------|------------------|----------|
| 0                  | 19.4              | 5.9              | 80       |
| 2000 (907)         | 13.1              | 1.0              | 140      |
| 4000 (1814)        | 9.2               | 2.8              | 210      |
| 6000 (2727)        | 7.2               | 2.2              | 285      |

SPARTAN 6000 ELECTRIC WINCH

Item Numbers:  
6000  
6000-SR

FEATURES

- Weather Sealed High Performance Motor
- Heavy Duty 3 Stage Gearbox
- Heavy Duty Drum Supports
- Weather Sealed Solenoids
- Full Steel Planetary Gearing
- Full Load Holding Brake
- Every winch is 100% Load Tested
- Chip Resistant Gloss Paint Finish

INCLUDED

- 10ft Remote Handset
- 5/16 Hook
- Aluminium or Roller Fairlead (Synthetic rope or steel cable)
- Heavy Duty Battery Leads
- Stainless Steel Mounting Hardware
- 0.27" x 98ft Synthetic Rope or 0.28" x 131ft Steel Cable



DESCRIPTION

We are delighted to announce the arrival of the Spartan Series, Tough, Strong and ready for a Battle, these Winches really will challenge all before them. We have reluctantly termed them as 'entry level', however this describes the price point, not the performance.

We really believe these to be the best value for money Winches around, a lower price does not mean that we have had to compromise the core values integral to a good winch, such as reliability and durability.

SPECIFICATION

**8000**  
**RATED LINE PULL:** 8000lbs(3629kg)  
**MOTOR: 12v :** 4.6hp / 3.2kw  
**GEARING:** 233:1  
**BRAKING ACTION:** Auto in the drum  
**DRUM SIZE Dia x L:** 2.5 x 8.8"  
**CABLE Dia x L:** 0.3" x 85 ft  
**MOUNT PATTERN:** 10 x 4.5"  
**DIMENSIONS:** 21.3 x 6.3 x 8.6"

**12000**  
**RATED LINE PULL:** 9500lbs(4500kg)  
**MOTOR: 12v :** 4.6hp / 3.2kw  
**GEARING:** 230:1  
**BRAKING ACTION:** Auto in the drum  
**DRUM SIZE Dia x L:** 2.5 x 8.8"  
**CABLE Dia x L:** 0.36" x 82 ft  
**MOUNT PATTERN:** 10 x 4.5"  
**DIMENSIONS:** 21.3 x 6.3 x 8.6"



**9500**  
**RATED LINE PULL:** 12000lbs (5400kg)  
**MOTOR: 12v :** 6.0hp / 4.6kw  
**GEARING:** 230:1  
**BRAKING ACTION:** Auto in the drum  
**DRUM SIZE Dia x L:** 2.5 x 8.8"  
**CABLE Dia x L:** 0.4" x 82 ft  
**MOUNT PATTERN:** 10 x 4.5"22.8 x 6.3 x 8.6"

SPARTAN SERIES ELECTRIC WINCH

Item Numbers:  
8000, 8000-SR  
9500, 9500-SR  
12000, 12000-SR

FEATURES

- Weather Sealed High Performance motor
- Heavy-Duty 3 Stage Gearbox
- Heavy-Duty Drum Supports
- Weather Sealed Solenoids
- Full Steel Planetary Gearing
- Full Load Holding Brake
- Every winch 100 % load tested
- Chip Resistant Gloss Paint Finish

INCLUDED

- Galvanized steel cable
- 10ft Remote Handset
- Heavy Duty Steel Roller Fairlead
- Heavy Duty Battery Leads
- Stainless Steel Mounting hardware
- Clevis hook





DESCRIPTION

Superb high specification winch. Ideal for recovery and 4x4 applications. Outstanding features include high quality series wound double sealed motor with brass fittings, heavy duty waterproof contactors, double sealed drum on maintenance free bearings, quiet, efficient full steel planetary gearing.

Comes with stainless steel roller fairlead and fittings as standard. Complete with Heavy Duty integrated wireless remote. Available with Armortek Synthetic Rope and Aluminum Fairlead.



Synthetic version available

SPECIFICATION

|                    | S8000             | S9500             |
|--------------------|-------------------|-------------------|
| RATED LINE PULL:   | 8000lbs(3629kg)   | 9500lbs(4500kg)   |
| MOTOR: 12v :       | 4.6hp / 3.2kw     | 4.6hp / 3.2kw     |
| GEARING:           | 210:1             | 230:1             |
| BRAKING ACTION:    | Auto in the drum  | Auto in the drum  |
| DRUM SIZE Dia x L: | 2.5 x 8.8"        | 2.5 x 8.8"        |
| CABLE Dia x L:     | 0.3" x 95 ft      | 0.4" x 85 ft      |
| MOUN PATTERN:      | 10 x 4.5"         | 10 x 4.5"         |
| DIMENSIONS:        | 21.3 x 6.3 x 8.6" | 21.3 x 6.3 x 8.6" |

|                    | S12000            |
|--------------------|-------------------|
| RATED LINE PULL:   | 12000lbs(5400kg)  |
| MOTOR: 12v :       | 6.5hp / 4.6kw     |
| GEARING:           | 230:1             |
| BRAKING ACTION:    | Auto in the drum  |
| DRUM SIZE Dia x L: | 2.5 x 8.8"        |
| CABLE Dia x L:     | 0.4" x 85 ft      |
| MOUNT PATTERN:     | 10 x 4.5"         |
| DIMENSIONS:        | 22.8 x 6.3 x 8.6" |

SAMURAI SERIES  
ELECTRIC WINCH

Item Numbers:  
S8000, S8000-SR  
S9500, S9500-SR,  
S12000, S12000-SR

FEATURES

- All Brass (no corrosion) Series Wound Motor
- Double Sealed Motor
- Sealed Waterproof Contactor
- Steel Contactor Cover
- Double Sealed Drum (Gearbox/Motor)
- Sealed 3 Stage Planetary Gears
- Stainless Steel 4 Way fairleads
- Integrated Wireless Remote

INCLUDED

- Galvanized steel cable
- 10ft Remote Handset
- Heavy Duty Stainless Steel Fairlead
- Heavy Duty Battery Leads
- Isolation switch
- Stainless Steel Mounting hardware
- Built In Wireless remote
- 5/16 hook



DESCRIPTION

The ultimate winch for Extreme Terrain. Fully Sealed with an unbeatable line Speed of 65 ft/min. Outstanding features includes Huge 6.5 hp high quality double sealed motor with brass fittings, heavy duty waterproof contactors, double sealed drum on maintenance free bearings, quiet, fully sealed efficient full steel planetary gearing.

Complete with heavy duty integrated wireless remote. Available with Steel Rope or Armortek Synthetic Rope and Aluminum Fairlead.



Steel Cable version available

SPECIFICATION

|                    |                   |
|--------------------|-------------------|
| RATED LINE PULL:   | 9500lbs(4500kg)   |
| MOTOR: 12v :       | 6.5hp / 4.5kw     |
| GEARING:           | 110:1             |
| BRAKING ACTION:    | Auto in the drum  |
| DRUM SIZE Dia x L: | 2.5 x 8.8"        |
| CABLE Dia x L:     | 0.4" x 98 ft      |
| MOUNT PATTERN:     | 10 x 4.5"         |
| DIMENSIONS:        | 22.7 x 6.3 x 8.5" |

| Layer of wire rope | Line pull lbs (kg) |
|--------------------|--------------------|
| 1                  | 9500 (4309)        |
| 2                  | 7706 (3495)        |
| 3                  | 6482 (2940)        |
| 4                  | 5400 (2400)        |

| Line pull lbs (kg) | Line speed ft/min | Line speed m/min | Amp draw 12v | Amp draw 24v |
|--------------------|-------------------|------------------|--------------|--------------|
| 0                  | 65                | 19.8             | 80           | 45           |
| 4000 (1818)        | 12.5              | 3.8              | 300          | 175          |
| 6000 (2722)        | 11.81             | 3.6              | 400          | 230          |
| 9500 (4309)        | 8.86              | 1.9              | 530          | 335          |

SAMURAI 9,500 LB  
HIGH SPEED  
PERFORMANCE WINCH

Item Numbers:  
S9500HS  
S9500HS-SR

FEATURES

- All Brass (no corrosion) Series Wound Motor
- Double Sealed Motor
- Sealed Waterproof Contactor
- Steel Contactor Cover
- Double Sealed Drum (Gearbox/Motor)
- Sealed 3 Stage Planetary Gears
- Integrated Wireless Remote

INCLUDED

- Wire rope 0.4" x 98ft
- 10ft Remote Handset
- Roller Fairlead (does not attach to winch)
- Heavy Duty Battery Leads
- Isolation switch
- Stainless Steel Mounting hardware
- Built In Wireless remote
- 5/16 hook





**DESCRIPTION**

The narrow drum version of the best selling 9500. A total width of 17.2 inches ensures this is the perfect product for limited space. The 5.0hp motor delivers 9500lb of pulling power in space normally designed for Winches with half the power.

The Short Drum winch is the preferred choice of the British Military on specialist vehicles currently serving in action. Available with synthetic rope and aluminium fairlead, to give a total weight of 44 lbs.



Steel Cable  
version available

**SPECIFICATION**

**RATED LINE PULL:** 9500lbs(4500kg)  
**MOTOR: 12v :** 5.0hp / 3.5kw  
**GEARING:** 230:1  
**BRAKING ACTION:** Auto in the drum  
**DRUM SIZE Dia x L:** 2.5 x 4.7"  
**CABLE Dia x L:** 0.4" x 46 ft  
**MOUNT PATTERN:** 5.9 x 4.5"  
**DIMENSIONS:** 17.2 x 6.3 x 10.7"

| Layer of<br>wire rope | Line pull<br>lbs (kg) | Line pull      |        |       | Line speed |     | Amp draw |  |
|-----------------------|-----------------------|----------------|--------|-------|------------|-----|----------|--|
|                       |                       | lbs (kg)       | ft/min | m/min | 12v        | 24v |          |  |
| 1                     | 9500<br>(4309)        | 0              | 23     | 7     | 80         | 70  |          |  |
| 2                     | 7706<br>(3495)        | 3000<br>(1361) | 12.5   | 3.8   | 170        | 140 |          |  |
| 3                     | 6482<br>(2940)        | 6000<br>(2722) | 9.8    | 3     | 260        | 210 |          |  |
| 4                     | 5593<br>(2537)        | 9500<br>(4309) | 6.4    | 1.9   | 380        | 270 |          |  |

**SAMURAI 9,500 LB  
SHORT DRUM WINCH**

**Item Numbers:**  
**S9500SD**  
**S9500SD-SR**

**FEATURES**

- Power in and Power out
- High Quality 5.0hp Series Wound Motor
- Heavy Duty Waterproof Contactors
- Full Steel Planetary Gearing
- Double sealed motor and drum
- Full Load Holding Brake
- Integrated Wireless remote

**INCLUDED**

- 0.4" x 46ft Wire Rope
- 10ft Remote Handset
- Heavy Duty Stainless Steel Fairlead
- Heavy Duty Battery Leads
- Isolation switch
- Stainless Steel Mounting hardware
- Built In Wireless remote
- 5/16 hook



**DESCRIPTION**

Warrior Winches are excited to announce the arrival of the colossal Samurai 17500 & 20000lb Winches. Designed for the toughest of applications & tested in the most extreme environments imaginable, these Winches boasts a massive 7.0 & 7.5 hp Series wound motors respectively.

Double sealed drum on maintenance free bearings and quiet, fully sealed efficient full steel planetary gearing ensures these immense Warriors are ready for any battle.

**SPECIFICATION**

**S17500 Winch**

**RATED LINE PULL:** 17 500lbs (7938kg)  
**MOTOR: 12v :** 7.0hp / 4.9kw  
**GEARING:** 430:1  
**BRAKING ACTION:** Auto in the drum  
**DRUM SIZE Dia x L:** 3.5 x 8.6"  
**CABLE Dia x L:** 0.5" x 85 ft  
**MOUNT PATTERN:** 10 x 4.5"  
**DIMENSIONS:** 24 x 8.5 x 10"  
**WEIGHT:** 147.7 lbs

**S20000 Winch**

**RATED LINE PULL:** 20 000lbs (9072kg)  
**MOTOR: 12v :** 7.5hp / 5.4kw  
**GEARING:** 430:1  
**BRAKING ACTION:** Automatic in the drum  
**DRUM SIZE Dia x L:** 3.5 x 8.6"  
**CABLE Dia x L:** 0.47" x 87 ft  
**MOUNT PATTERN:** 10 x 4.5"  
**DIMENSIONS:** 24 x 8.6 x 10.7"  
**WEIGHT:** 158.7 lbs

**SAMURAI 17500  
& 20000 LBS  
WINCHES**

**Item Numbers:**  
**S17500**  
**S20000**

**FEATURES**

- All Brass (no corrosion) Series Wound Motor
- Double Sealed Motor
- Sealed Waterproof Contactor
- Reinforced Plastic Contactor Cover
- Double Sealed Drum (G-box/Motor)
- Sealed 3 Stage Planetary Gears
- Stainless Steel 4 Way fairleads
- High Quality Steel Drum Supports

**INCLUDED**

- 0.5" x 85ft Wire Rope
- 10ft Remote Handset
- Heavy Duty Stainless Steel Fairlead
- Heavy Duty Battery Leads
- Isolation switch
- Stainless Steel Mounting hardware
- Wireless Remote





**DESCRIPTION**

The Predator is designed for hard-core competition. Two powerful 7.2HP sealed motors provide a performance that is truly out of this World, coupling this with a 108:1 ratio 3 stage planetary gearbox enables this performance winch to handle even the most extreme off-road punishment.

With a surprisingly low draw of only 140 amps (at no load), the Predator also contains an innovative “multi stop” 10% ratchet brake design, which provides zero drag when returning the “cable in”, and is situated away from the drum to prevent any damaging heat transferring to your Armortek or Synthetic rope.

The steel drum flanges are precision machined to 0.39” on either side to resist the unique loading characteristics of synthetic rope, while the Alloy Carbon gears are heat treated and tempered to 62HRC rating for extra strength. This Warrior from another dimension will mercilessly prey on its weaker rivals, hunting the opposition down. At 10kg lighter than any of its nearest competitors, with off-load line speeds from 65ft per minute & available with or without synthetic rope, there’s a Predator out there, ready & waiting, for everyone!

**SPECIFICATION**

**RATED LINE PULL:** 10 000lbs (4536kg)  
**MOTOR: 12v :** 7.2hp / 5.4kw  
**GEARING:** 108:1  
**DRUM SIZE Dia x L:** 2.8 x 8.42”  
**CABLE Dia x L:** 0.35” x 124ft  
**MOUNT PATTERN:** 10 x 4.5”  
**DIMENSIONS:** 18.8 x 10.3 x 13.9”  
**WEIGHT:** 99lbs

| Layer of wire rope | Line pull lbs (kg) | Total Rope on drum ft(m) | Line pull lbs (kg) | Line speed ft(m)/min 12v | Amp draw 12v |
|--------------------|--------------------|--------------------------|--------------------|--------------------------|--------------|
| 1                  | 10000 (4536)       | 18.4 (5.6)               | 0                  | 66 (20)                  | 140          |
| 2                  | 8153 (3698)        | 41.0 (12.5)              | 4000 (1816)        | 19.7 (6.0)               | 400          |
| 3                  | 6881 (3131)        | 68.9 (21)                | 6000 (2722)        | 16.7 (5.1)               | 560          |
| 4                  | 5953 (2700)        | 101 (30.8)               | 8000 (3629)        | 13.1 (4.0)               | 690          |
| 5                  | 5245 (2379)        | 131.2 (40)               | 10000 (4536)       | 10.5 (3.2)               | 790          |

**PREDATOR**

**PREDATOR 10,000 LB  
DUAL MOTOR  
PERFORMANCE WINCH**

**Item Number:  
P10000D-SR**

**FEATURES**

- Dual 7.2HP (5.4KW) Sealed Motors
- Sealed Motor conforms to IP67
- Sealed Waterproof Contactor
- “Multi Stop” 10% Ratchet Brake Design
- Sealed 3 Stage Planetary Gears
- Alloy Carbon Gears hardened to 62HRC rating
- No load speed of 65ft/min

**INCLUDED**

- 0.35” x 124ft Synthetic Armortek Rope
- Wireless remote with LCD Display
- Heavy Duty Remote Control
- Silver Warrior Aluminum Fairlead
- Heavy Duty Battery Leads
- Stainless Steel Mounting hardware
- 12 Ton Competition Hook



**DESCRIPTION**

Compact, tough. A hydraulic winch for industrial and commercial applications. The unique patented steel gearing system combined with a highly efficient and powerful hydraulic motor ensures maximum performance over the full load range.

Complete with internal brake to ensure maximum control and load holding. Stainless steel roller fairleads and fittings are standard.

**SPECIFICATION**

**10 000 NH HYDRAULIC Winch**

**RATED LINE PULL:** 10 000lbs (4536kg)  
**MAX LINE PULL:** 12 500lbs (5670kg)  
**MOTOR:** Hydraulic Dis 50 ml/r  
**GEARING:** 33:1  
**DRUM SIZE Dia x L:** 2.8 x 8.8”  
**CABLE Dia x L:** 0.4” x 87ft  
**MOUNT PATTERN:** 10 x 4.5”  
**DIMENSIONS:** 20 x 7.3 x 8.8”

**15 000 NH HYDRAULIC Winch**

**RATED LINE PULL:** 15 000lbs (6804kg)  
**MAX LINE PULL:** 17 000lbs (7711kg)  
**MOTOR:** Hydraulic Dis 80 ml/r  
**GEARING:** 37:1  
**DRUM SIZE Dia x L:** 3.5 x 8.8”  
**CABLE Dia x L:** 0.5 x 87ft  
**MOUNT PATTERN:** 10 x 4.5”  
**DIMENSIONS:** 20.9 x 8.1 x 9.7”

**NH SERIES  
HYDRAULIC  
WINCHES**

**Item Numbers:  
10000NH  
15000NH**

**FEATURES**

- Patented Heavy Duty Gearing
- Integral, Automatic Failsafe Brake
- Spring Engaged Manual Freespool
- Stainless Steel fairlead and Fittings
- Rugged and compact for Long Life

**INCLUDED**

- Steel cable (see below)
- Heavy Duty Roller Fairlead (10000/15000NH)
- 5/16 or 3/8 Hook





## DESCRIPTION

Compact, tough. A hydraulic winch for industrial and commercial applications. The special heat treated planetary gearing system combined with a highly efficient and powerful hydraulic motor ensures maximum performance over the full load range.

Complete with internal brake to ensure maximum control and load holding.

## SPECIFICATION

### 10 000 NW Winch

|                           |                            |
|---------------------------|----------------------------|
| <b>RATED LINE PULL:</b>   | 10 000lbs (4536kg)         |
| <b>MAX LINE PULL:</b>     | 12 500lbs (5670kg)         |
| <b>MOTOR:</b>             | Hydraulic Dis 100.8 ml/r   |
| <b>GEARING:</b>           | 16:1                       |
| <b>DRUM SIZE Dia x L:</b> | 3.9 x 9.9"                 |
| <b>CABLE Dia x L:</b>     | 1/2" x 86 ft               |
| <b>MOUNTING:</b>          | 14.6 x 4.5" (11.34 x 4.5") |
| <b>DIMENSIONS:</b>        | 25 x 10.33 x 9.39"         |

### 15 000 NW Winch

|                           |                           |
|---------------------------|---------------------------|
| <b>RATED LINE PULL:</b>   | 15000lbs(6810kg)          |
| <b>MAX LINE PULL:</b>     | 17 500lbs (7954kg)        |
| <b>MOTOR:</b>             | Hydraulic Dis 160 ml/r    |
| <b>GEARING:</b>           | 17.2:1                    |
| <b>DRUM SIZE Dia x L:</b> | 5 x 10.6"                 |
| <b>CABLE Dia x L:</b>     | 0.6" x 92 ft              |
| <b>MOUNTING:</b>          | 11.9 x 4.5" (14.5 x 4.6") |
| <b>DIMENSIONS:</b>        | 28.2 x 11.1 x 12"         |

## NW SERIES HYDRAULIC WINCHES

Item Numbers:  
10000NW  
15000NW

## FEATURES

- Patented Heavy Duty Gearing
- Integral, Automatic Failsafe Brake
- Spring Engaged Manual Freespool
- Rugged and Compact for Long Life
- Meets the requirements of SAE J706

## INCLUDED

- 86 ft x 1/2" steel cable
- 5/16 Hook
- Tensioner included



## DESCRIPTION

Tough and compact, the JP series are heavy duty hydraulic winches designed and tested for toughest applications.

Minimum rope to drum ratio of 10:1, multi disc frictional brake, balance valve and rope tensioner as standard.

Available from 10 tonne to 40 tonne. Manufactured to meet GJB82-86 National Military Standard.



## SPECIFICATION

|                                     | 10TJP                  | 13.5TJP                | 15TJP                  |
|-------------------------------------|------------------------|------------------------|------------------------|
| <b>RATED LINE PULL</b> (btm layer): | 10 000 kg<br>22046 lbs | 13 500 kg<br>29762 lbs | 15 000 kg<br>33069 lbs |
| <b>WORKING SPEED</b> (btm layer):   | 21.6ft/min*            | 24.6ft/min             | 20ft/min               |
| <b>ARRESTER RESP PRESS:</b>         | 5 Mpa                  | <2.5 Mpa               | <2.5 Mpa               |
| <b>WORKING PRESSURE:</b>            | 20 Mpa                 | 17 Mpa                 | 17 Mpa                 |
| <b>OIL FLOW:</b>                    | 15-75 L/min            | 110 L/min              | 110 L/min              |
| <b>DRUM SIZE:</b>                   | 5.4x12.4"              | 15.7x8.3x13.4"         | 15.7x8.3x13.4"         |
| <b>REC ROPE SIZE:</b>               | 157ft x 0.6"           | 131ft x 0.7"           | 230ft x 0.9"           |
| <b>WEIGHT:</b>                      | 363 lbs                | 578 lbs                | 628 lbs                |
|                                     | 20TJP                  | 30TJP                  | 40TJP                  |
| <b>RATED LINE PULL</b> (btm layer): | 20 000 kg<br>44092 lbs | 30 000 kg<br>66138 lbs | 40 000 kg<br>88184 lbs |
| <b>WORKING SPEED</b> (btm layer):   | 20ft/min               | 18ft/min               | 10ft/min               |
| <b>ARRESTER RESP PRESS:</b>         | <2.5 Mpa               | <2.5 Mpa               | <2.5 Mpa               |
| <b>WORKING PRESSURE:</b>            | 17 Mpa                 | 17 Mpa                 | 17 Mpa                 |
| <b>OIL FLOW:</b>                    | 120 L/min              | 120 L/min              | 120 L/min              |
| <b>DRUM SIZE:</b>                   | 20.9x8.3x13.4"         | 20.9x11x14.2"          | 23.7x11x18.9"          |
| <b>REC ROPE SIZE:</b>               | 197ft x 1"             | 197ft x 1.3"           | 213ft x 1.4"           |
| <b>WEIGHT:</b>                      | 650 lbs                | 1257 lbs               | 1763 lbs               |

\*when oil flow 60L/min

## JP SERIES HYDRAULIC WINCHES

Item Numbers:  
10TJP, 13.5TJP, 15TJP  
20TJP, 30TJP, 40TJP

## FEATURES

- Full Float Heavy Duty Planetary Gearing
- Multi Disc Friction Brake
- Minimum 10:1 Rope/Drum Ratio
- High Torque Industrial Motor
- Air and Manual Clutch Operation

## INCLUDED

- Heavy Duty Rope Tensioner as Standard
- Balance Valve as Standard



AMORTEK WINCH ROPE

CENTURION WIRELESS REMOTE

**ARMORTEK**  
WINCH ROPES

- Armortek synthetic rope is 70% stronger than wire!
- Armortek weighs 6 times less than wire.
  - Unlike wire, Armortek will not whiplash if broken.
  - Armortek is rated at 70% stronger than wire.
  - Armortek floats, wire doesn't.
  - Armortek is coated to prevent abrasion.
  - You don't have to worry about wire splinters.

|               |                   |                    |
|---------------|-------------------|--------------------|
| Diameter      | 6mm (3/16")       | 9.5mm (3/8")       |
| Breaking Load | 3200 kg (7040 Lb) | 7500 kg (16500 Lb) |

Part no: HW0884-CAD: 6mm x 16m (1/4" X 50') Synthetic Rope  
Part no: HW0932/45-CAD: 10mm x 14m (3/8"x 45') Synthetic Rope  
Part no: HW0932/85-CAD: 10mm x 26m (3/8" x 85') Synthetic Rope



- The ultimate remote for the professional user.
- Two-way Closelink wireless communication.
  - Distinct source code so no interference from other remotes in the vicinity.
  - Centurion devices are perfectly watertight.
  - Output protection from short circuits & surges.
  - Manufactured in highly resistant moulded plastic with a rubber shell for protection.
  - The absence of mechanical elements enables functioning in unfavourable environments, with a temperature range from -20°C to +55°C.



Part no: CENT12/242FCT - Centurion Remote

ROLLER FAIRLEAD

ROLLER FAIRLEAD

ALUMINIUM FAIRLEADS

ALUMINIUM FAIRLEADS



Part No: RFF400-CAD  
Chrome 4 Way Roller Fairlead For Winches Up to 4500 lb.



Part No: RFS150-CAD  
Stainless Fairlead With Hole Centres 255mm.



ALI450-CAD - 2500/3500 Winch .  
ALXT450-CAD - 4500 XT Winch.



ALI950-CAD - 9500SD Winch.  
ALIO15-CAD - 8000/9500/12000 Winch.

HOOK & RELEASE PIN

2T PULLY BLOCK

4T PULLY BLOCK

8T PULLY BLOCK



CHK014-CAD - 1/4 Steel Hook  
CHK038-CAD - 3/8 Steel Hook  
CHK516-CAD - 5/16 Steel Hook



Part No: PBK300-CAD  
2 Tonne Pully Block Hook Type.



Part No: PBK900-CAD  
4 Tonne Swingway Pully Block.



Part No: PBK150-CAD  
8 Tonne Swingway Pully Block.

WINCH KIT

WINCH KIT PRO

WINCH COVER SMALL

WINCH COVER



Part No: AWK001-CAD  
Warrior Bag, 1m Strop, 1/4 Shackle, 4T Pully Block.



Part No: LWK001-CAD  
Warrior bag, 2m Strop, Gloves, 4.75 Shackle, 8T Pully Block.



Part No: SWC001-CAD  
ATV Small Winch Cover.



Part No: LWC003-CAD  
Winch Cover For Heavy Duty Winches up to 13000lbs.

SHACKLES

TREE STROP

WINCH STOPPER

PORTABLE BUMPER



SHK325-CAD - 3.25 Tonne Shackle.  
SHK475-CAD - 4.75 Tonne Shackle.



Part No: STP002-CAD  
2m x 60mm - 14 Tonne tree strop.



Part No: RWS001-CAD  
Rubber removable winch stopper.



Part No: PWM001-CAD  
Portable bumper.

INSTALLATION PLATE

INSTALLATION PLATE

INSTALLATION PLATE

INSTALLATION PLATE



Part No: IST900-CAD  
Winch installation plate for Winches up to 9 000lb.



Part No: IST500-CAD  
Winch installation plate for 9500 SD Winches.



Part No: IST600-CAD  
Winch installation plate for Winches up to 15 000lb.



Part No: IST200-CAD  
Winch installation plate for Winches up to 20 000lb.

WIRED REMOTE

WIRED REMOTE

ATV HANDLEBAR REMOTE

WIRELESS REMOTE



Part No: HRO001-CAD  
Toggle (WARN Type) Hand Held Wired Remote.



Part No: HRO002-CAD  
Hand held remote for XT and A Series (air socket).



Part No: ATR001-CAD  
ATV / Quad Handlebar Remote.



Part No: CPW001-CAD  
Wireless Remote Control With Key Fob Handset / Air Socket.

WIRELESS REMOTE

WIRELESS REMOTE

WIRELESS REMOTE

ATV CONNECTOR



Part No: EWX001-CAD  
Heavy Duty Wireless Remote Control / NO Socket.



Part No: EWX002-CAD  
Heavy Duty Wireless Remote Control with Socket.



Part No: EWX003-CAD  
Wireless Remote Control for XT and A series (Air Socket).



Part No: AIRS01-CAD  
ATV to Standard Socket Connector.

Y CABLE

SOLENOID SET

ISOLATION SWITCH

EXTENSION SOCKET



Part No: AIRS02-CAD  
Y Cable For Dual Connection.



Part No: ATC012-CAD  
Solenoid Set For Up to 4500lbs Winch.



Part No: BAT001-CAD  
Battery Isolation Switch.



Part No: EXT001-CAD  
Solenoid Box Extension Socket.

HD CONTACTOR

WINCH UPGRADE KIT

SNAP CONNECTOR

6.5 HP 12V MOTOR



Part No: CON012-CAD  
12v Heavy Duty Contactor.



Part No: AUK001-CAD  
Universal 12v Winch Upgrade Kit & Mini Thumbswitch.



Part No: QCC400-CAD  
400 amp Snap Connector.



Part No: EPW012-CAD  
6.5 HP 12v Motor.





**DK2 CANADA**  
1080 Clay Avenue,  
Unit 2, Burlington, Ontario,  
L7L 0A1, Canada

**DK2 USA**  
6245 Industrial Parkway  
Whitehouse, Ohio,  
43571, United States

**TEL: 1-888-277-6960 [WWW.DETAILK2.COM](http://WWW.DETAILK2.COM)**