

HAR-602 Air Control Unit

DESCRIPTION

This unit is designed to remove water and dirt particles.

SPECIFICATIONS:

Air Inlet:	1/2 NPT (female)
Air Outlet:	1/4 NPSM (male)
Air Capacity:	120 CFM filter 50 CFM regulator
Max. Pressure:	150 PSI
Max. Temp.:	150° F
Filter Size:	5 micron



Risk of personal injury.
Risk of property damage.

**RELEASE ALL AIR PRESSURE
BEFORE SERVICING.**

This product is specifically designed for compressed air service. Use with any other fluid (liquid or gas) is a misapplication. For example, use with or injection of certain hazardous gases in the system (such as oxygen or liquid petroleum gas) could be harmful to the unit or result in a combustible condition that may cause fire or explosion. Manufacturer's warranties are void in the event of misapplication and manufacturer assumes no responsibility for any resulting loss.

INSTALLATION

1. Assemble unit (refer to Figure 1).
2. Install with the air flowing into the top of the filter.
3. Install in a vertical position.

OPERATION

1. Turn the regulator's handle clockwise to increase pressure.
2. To decrease pressure, turn the handle counterclockwise.
3. Relieve downstream pressure by triggering spray gun or tool.

MAINTENANCE

1. Drain filter daily.
2. Depressurize before replacing filter element.
3. Replace element at least once per year.


SERVICE PARTS

See Parts List, page 2.

WARRANTY

This product is covered by DeVilbiss' one year limited warranty. See SB-1-000 which is available upon request.

FIGURE 1

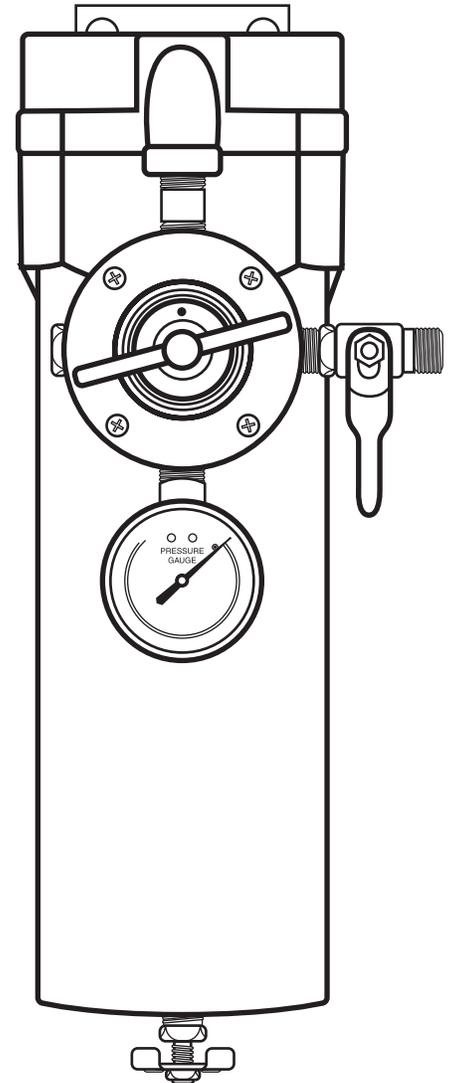


PARTS LIST

Ref. No.	Order No.	Part No.	Description	Individual Parts Req.
1	130100	HAR-520	Regulator	1
2	240160	VA-594	Shut-Off Valve	1
3	192314	GA-375	Pressure Gauge	1
4	192315	HAF-39	Element & Gasket Kit	1
5	*	*	Socket Head Screw, 1/4-20 x 3/4	4
6	*	*	Wingnut, 1/4-20	1
7	802112	KK-5088	Regulator Kit	1

* Purchase Locally

FIGURE 2

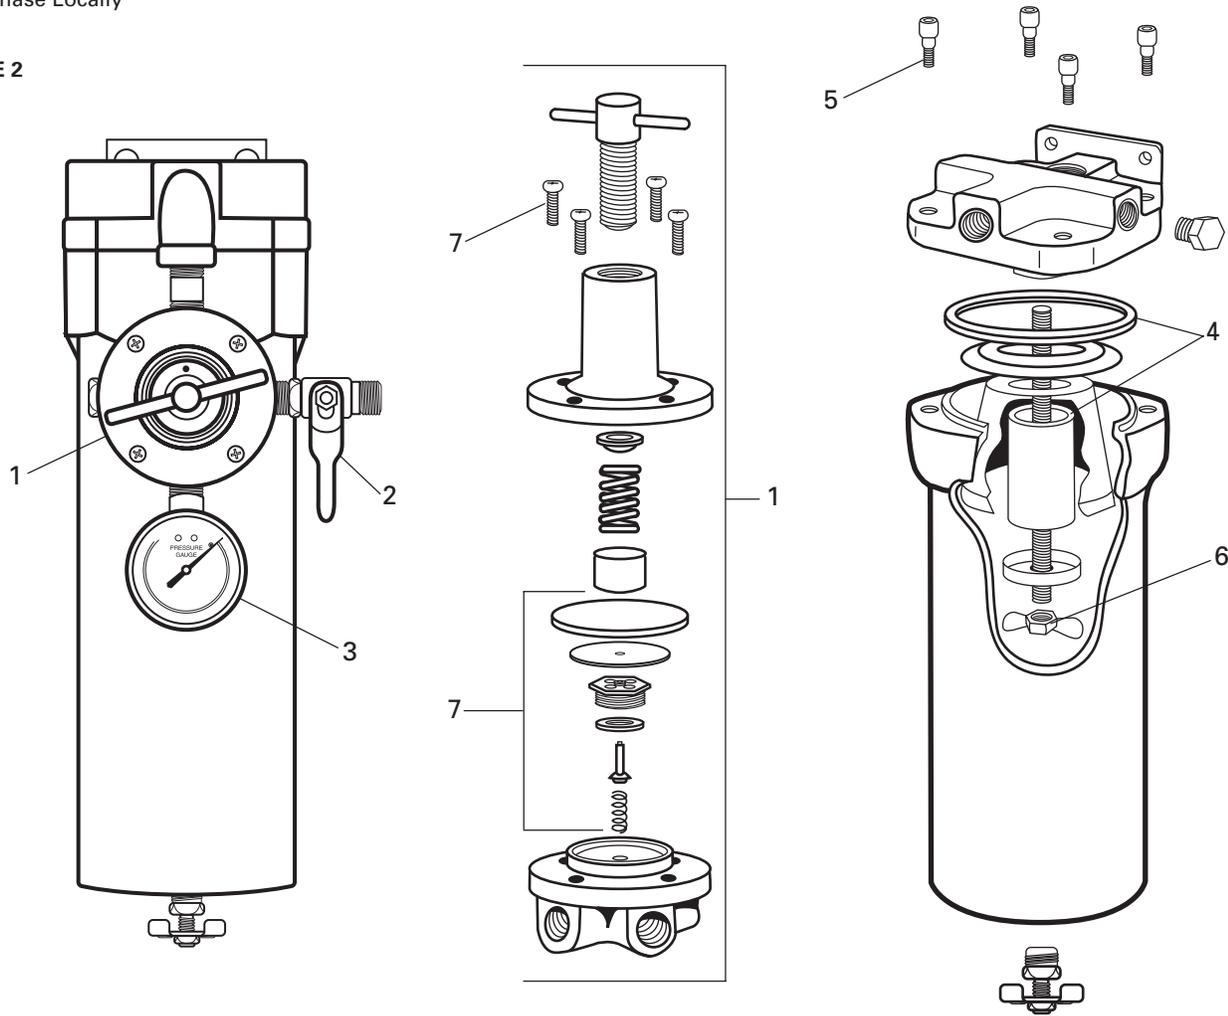

WARRANTY

This product is covered by DeVilbiss' 1 Year Limited Warranty.

DeVilbiss Worldwide Sales and Service Listing: www.devilbiss.com

ITW Automotive Refinishing

DeVilbiss has authorized distributors throughout the world. For equipment, parts and service, check the Yellow Pages under "Automotive Body Shop Equipment and Supplies." For technical assistance, see listing below.

U.S./Canada Customer Service Office:

1724 Indian Wood Circle, Suite J-K, Maumee, OH 43537
 Toll-Free Telephone: 1-800-445-3988 (U.S.A. and Canada only)
 Toll-Free Fax: 1-800-445-6643




Refer to Service Bulletin: SB-6-180

Customer Service
1-800-445-3988

Air Control Unit

130099 (HAR-602)

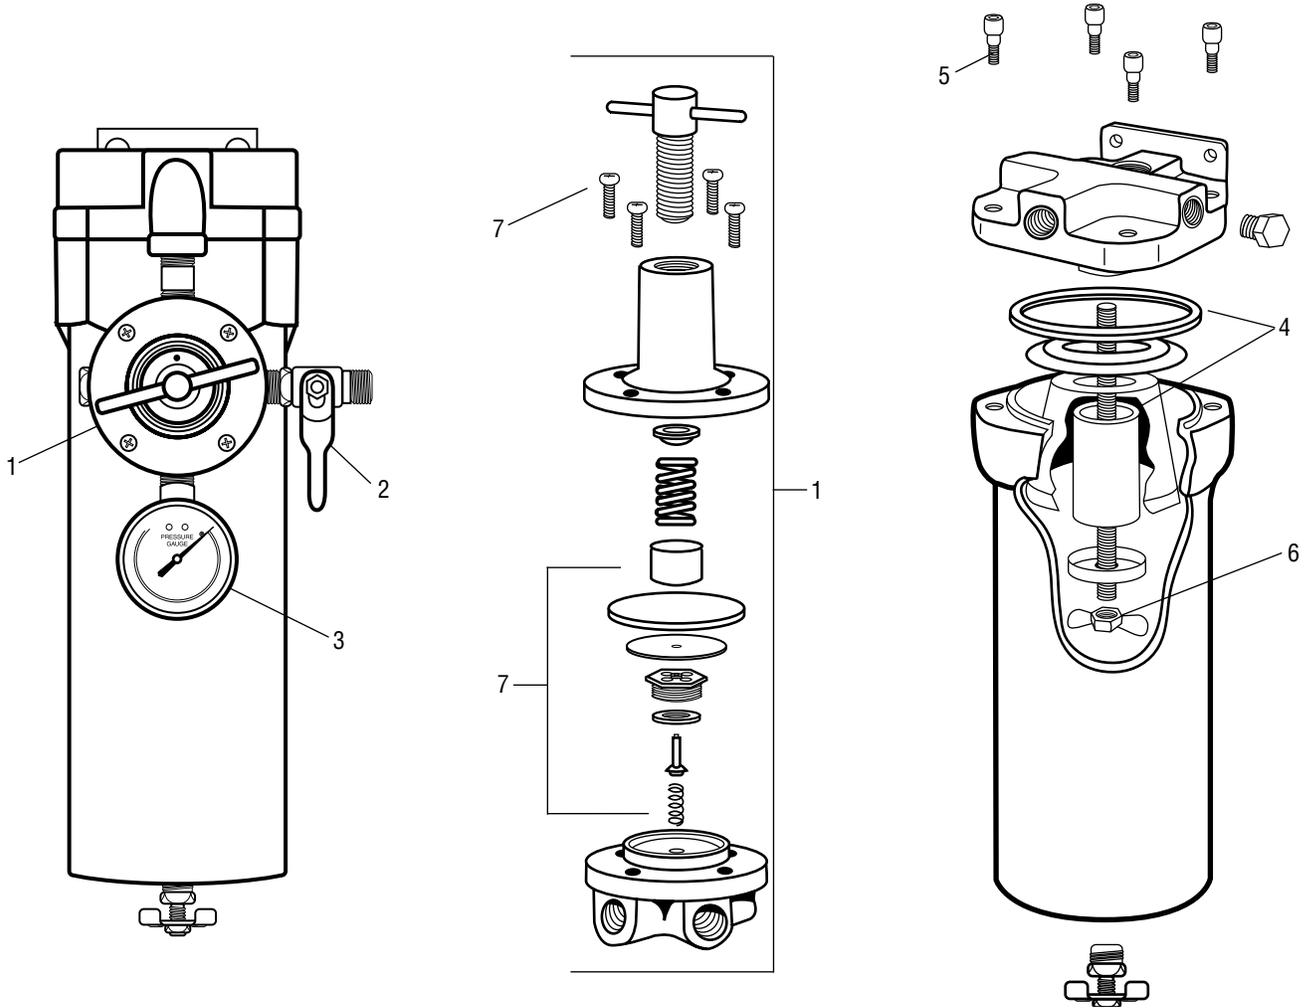

Ref. No.	Order No.	Model No.	Description	Ind. Parts Required
1	130100	HAR-520	Regulator	1
2	240160	VA-594	Shut-Off Valve	1
3	192314	GA-375	Pressure Gauge	1
4	192315	HAF-39	Element & Gasket Kit	1
5	*	*	Socket Head Screw, 1/4-20 x 3/4	4
6	*	*	Wingnut, 1/4-20	1
7	802112	KK-5088	Regulator Kit	1

* Purchase Locally